



REV	E.C.N NO.	CONTENT	CHK	DATE
		Type	Thread size (M/PG)	
		ULO-HC07-H16B-SF-1L-CV-M25	M25	
		ULO-HC07-H16B-SF-1L-CV-2M25	2M25	
		ULO-HC07-H16B-SF-1L-CV-PG21	PG21	
		ULO-HC07-H16B-SF-1L-CV-2PG21	2PG21	

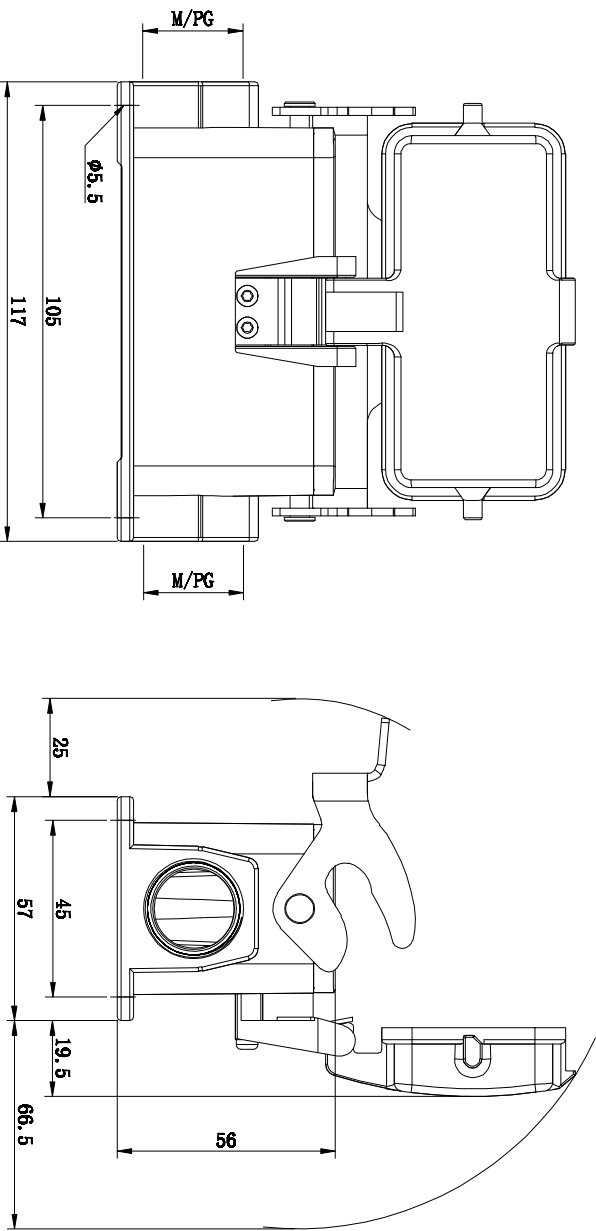

Technical specification:

1. Material: Aluminium die-cast
2. Materia, coverl: PC
3. Surface:powder-coated
4. Colour: (grey)
5. Temperature range:-40℃ - +125℃
6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
7. Locking element:
locking type:single locking latch
material: metal galvanized/nickel plating
8. Cable entry: side entry
9. Thread size: M/PG
- 10 Hoods/Housings sealing: NBR

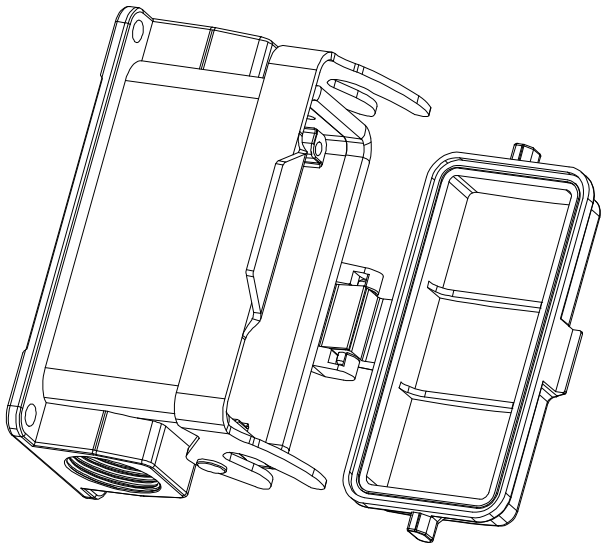

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	SWL	DATE	2023.12.9	UNITS	MM	SHEET/OF 1/1
CHK.	DATE	DATE		SCALE	1:1	A4
APP.	DATE			NAME	ULO-HC07-H16B-SF-1L-CV-XX	
				DWGNO.		