
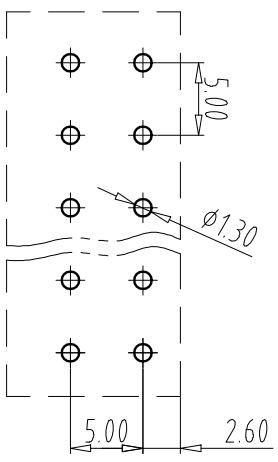
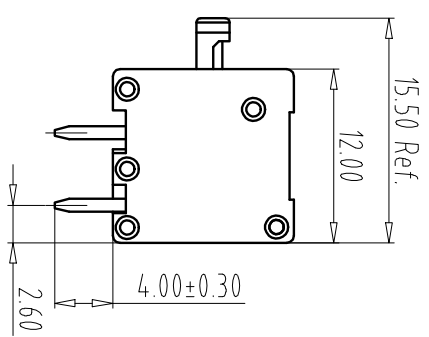
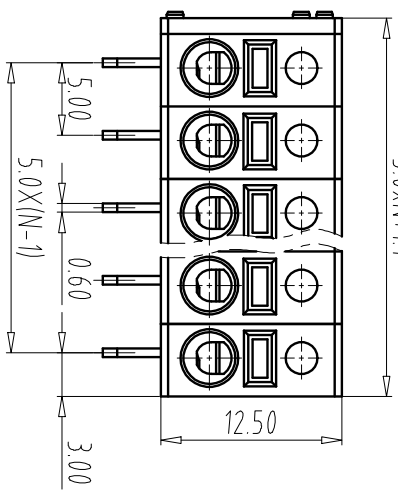
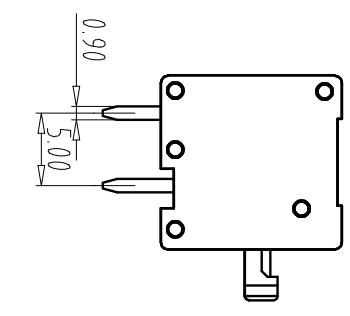


FILE: 2020-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

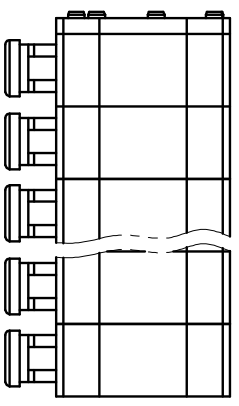

PCB LAYOUT

NOTES:

UL Standard

1. Use group	B	C	D
Rated Current	8A	-	-
Rated Voltage	300V	-	-

2 Wire range: 24~20AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	II	II	II
Rate Impulse Voltage(KV)	-	2KV	-
Rate Voltage(V)	-	250V	-
Rate Current(A)	-	15A	-

2. Wire range: 0.2-0.5mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Cover: PA66(UL94V-0)

3.Pin header: Copper Alloy(Sn Plated)

4.Spring: Stainless steel

5.Button: POM(UL94HB)

NOTES3:

1.Pitch: 5.0mm Poles: 02-24P

2.Stripping length: 8-9mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

UL0-TB12 - 21R/5.0 - XXP - Y 0.0 0A

Certificate Factory poles

Series NO. Code

Customer requirements

- color:
- 1:Grey
 - 2:Blue
 - 3:Black
 - 4:Green
 - 5:Orange
 - 6:Red
 - 7:transparent
 - 8:Yellow
 - 9:White

Total Pitch Tolerances		Nominal dimension range							
over	in mm	over	in mm	over	in mm	over	in mm	over	in mm
0	30	53	70	90	115	150	200	250	30
to	to	to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.08	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	UL0-TB12-21R/5.0-XXP-Y000A		



NINGBO UL0 ELECTRONICS CO.,LTD.

UL0TB12Y000A