

2		1	
REV	E.C.N NO.	CONTENT	CHK

NOTES1:

UL Standard

1.	Use group	B	C	D
	Rated Current	12A	—	10A
	Rated Voltage	300V	—	300V

2.Wire range:28-14AWG

IEC Standard 1.

Pollution Degree	2
Overvoltage Category	III
Rate Voltage(V)	200V
Rate Current(A)	17.5A

2.Wire range:0.2-1.5mm²

3.Rate Imuples Voltage(KV): 2.5

NOTES2:

- 1.Housing: PA66(UL94V-0) (Black)
- 2.Button : PA66(UL94V-0) (White)
- 3.Spring : Stainless steel
- 4.Clamp : Brass(Sn Plated)



NOTES3:

- 1.Pitch: 3.50mm Poles: 02-24P
- 2.Stripping length: 7-8mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

ULO-TB01	-	212R/3.5	-	XXP	-	Y	000A
Certificate	Factory	poles				Customer	
Series NO.	Code					requirements	
						color:	
						1:Grey	2:Blue 3:Black
						4:Green	5:Orange 6:Red
						7:transparent	8:Yellow 9:White

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	HSH	DATE	22.05.11	UNITS	MM	SHEET/OF	1/1	
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE						
				NAME	ULO-TB01-212R/3.5-XXP-Y000A			
				DWGNO.				

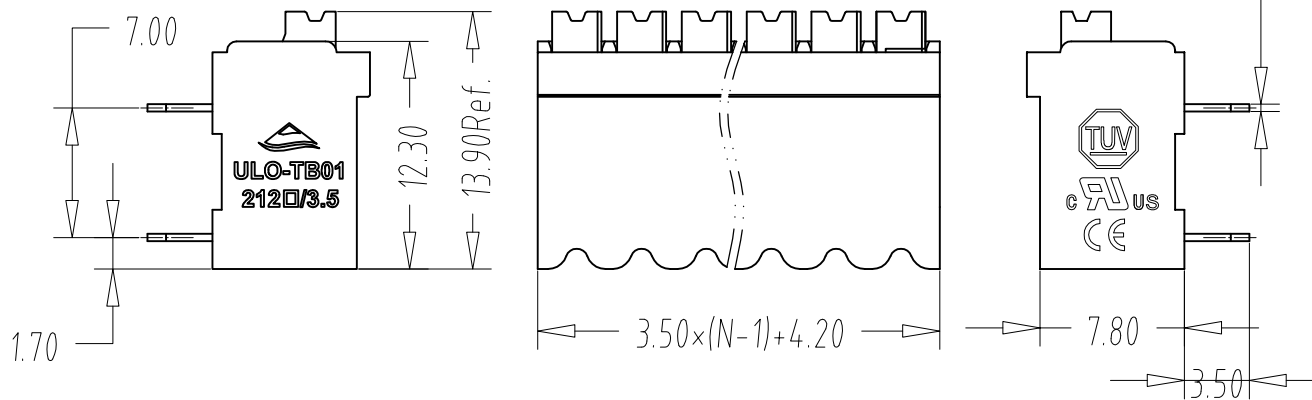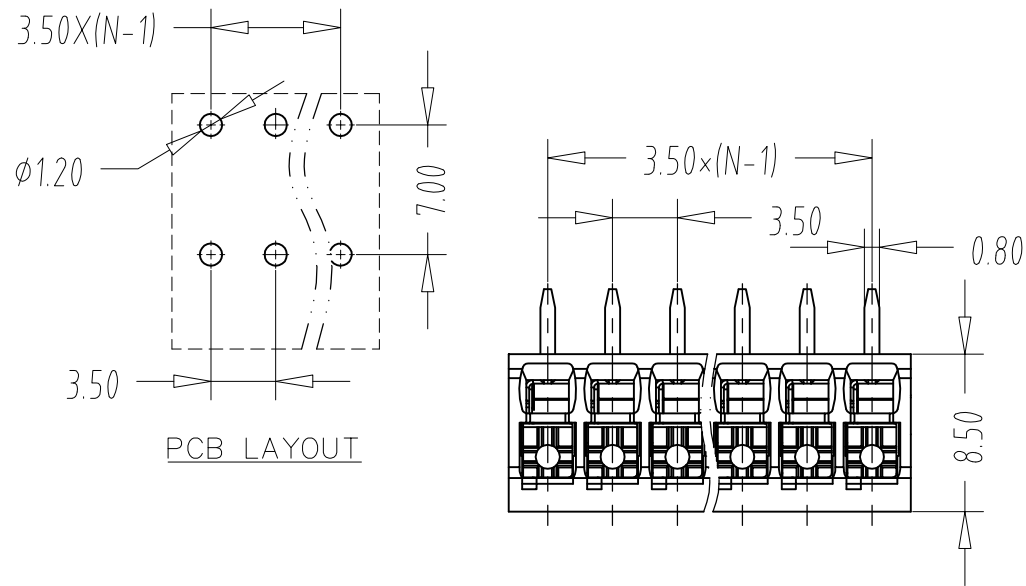

A	Total Pitch Tolerances in mm								Nominal dimension range in mm																
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 30	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 30	over 30	over 53	over 70	over 90	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10	all	to 100	to 100	to 150	to 150
	±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80 ±0.90		0.2	0.3	0.3	0.2	0.3	0.5	0.5
6						5						4													