

FILE: 2020-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	20A	-	-
Rated Voltage	500V	-	-

2. Wire range22-12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	4kV
Rate Voltage(V)	450V
Rate Current(A)	32A

2. Wire range4.0mm²

NOTES2:

1.Housing: PA66(UL94V-2)

2.Current carrier: Steel(Zn Plated)

3.Screw: Steel(Zn Plated)

NOTES3:

1.Pitch: 8.0mm Poles: 02-12P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order





UL0-TB - 230 - XXP - Y 0 0 0 A

Certificate Factory poles Customer requirements
Series NO. Code

color:

- 1:Grey 2:Blue 3:Black
- 4:Green 5:Orange 6:Red
- 7:transparent 8:Yellow 9:White

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.04.21	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	1/1
APP	DATE	NAME	UL0-TB-230-XXP-Y000A		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO	UL0TBV000A	

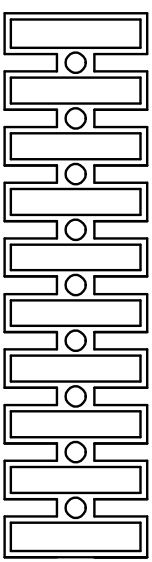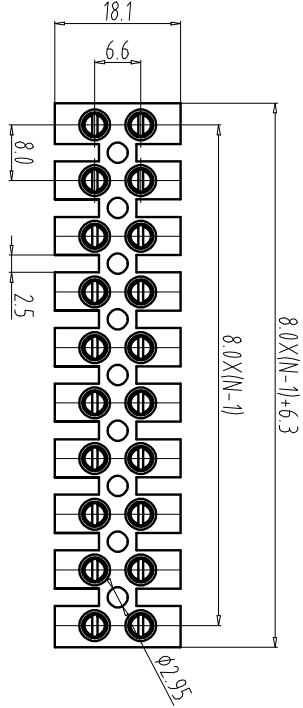

Total Pitch Tolerances		Nominal dimension range		Tolerance		Tolerance	
in mm		in mm		in mm		in mm	
over	0	over	0	over	0	over	0
30	53	70	90	115	150	200	250
to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70
±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	±1.00