


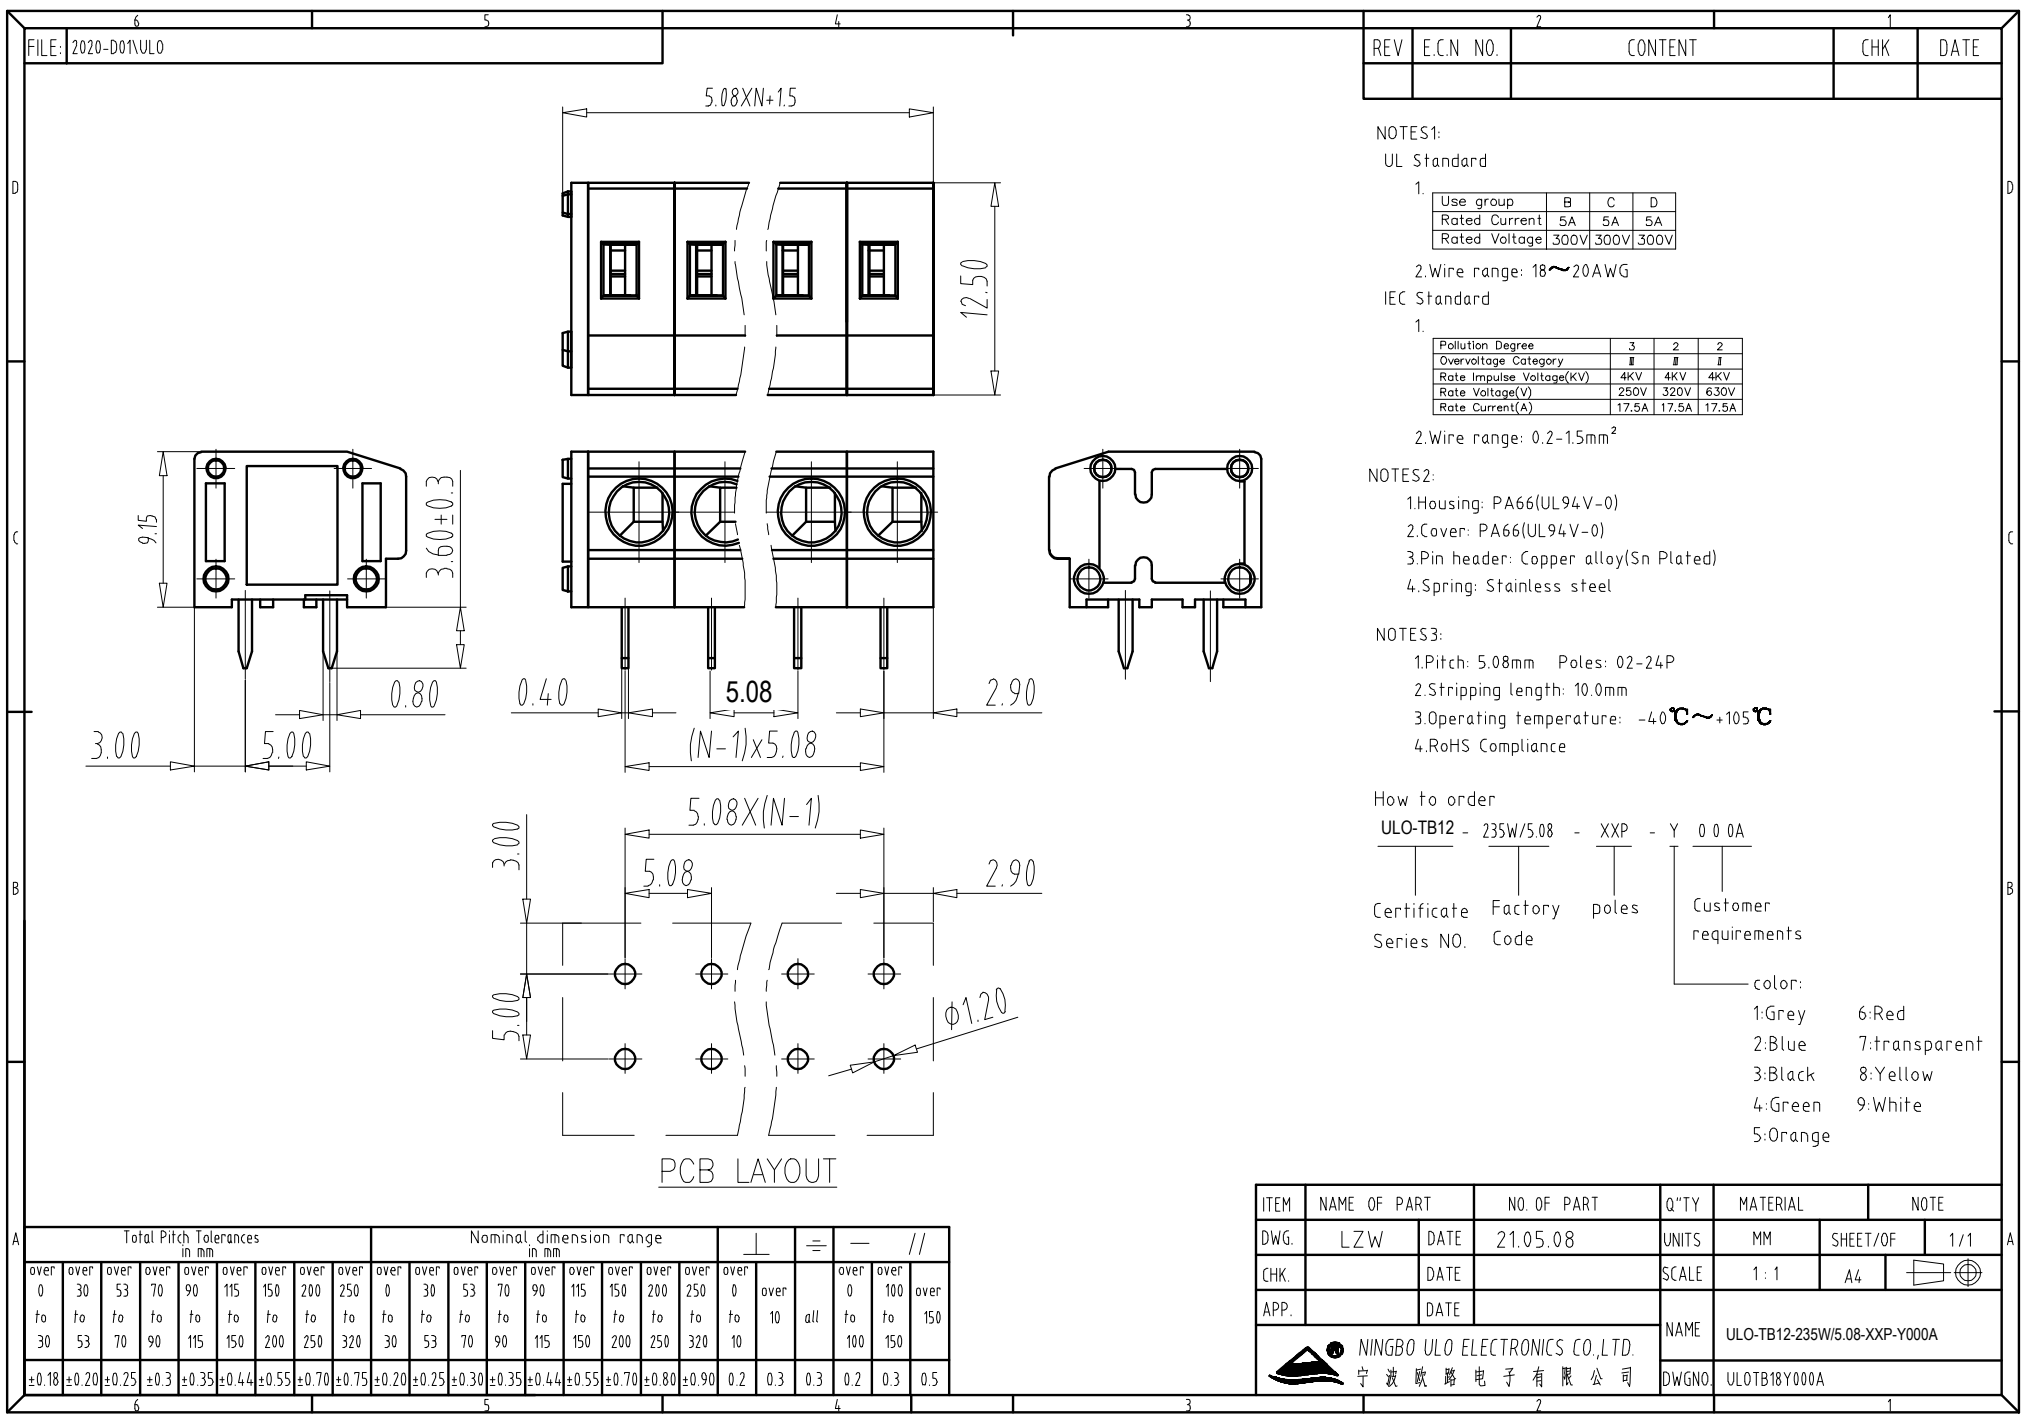

FILE: 2020-D01VULO

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.	Use group	B	C	D
	Rated Current	5A	5A	5A
	Rated Voltage	300V	300V	300V

2.Wire range: 18~20AWG

IEC Standard

1.	Pollution Degree	3	2	2
	Overvoltage Category	II	II	II
	Rate Impulse Voltage(KV)	4KV	4KV	4KV
	Rate Voltage(V)	250V	320V	630V
	Rate Current(A)	17.5A	17.5A	17.5A

2.Wire range: 0.2-1.5mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Cover: PA66(UL94V-0)
- 3.Pin header: Copper alloy(Sn Plated)
- 4.Spring: Stainless steel

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Stripping length: 10.0mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

ULO-TB12 - 235W/5.08 - XXP - Y 0 0 0A

Certificate Series NO. Factory Code poles Customer requirements

color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.08	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	ULO-TB12-235W/5.08-XXP-Y000A
				DWGNO.	UL0TB18Y000A



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司