


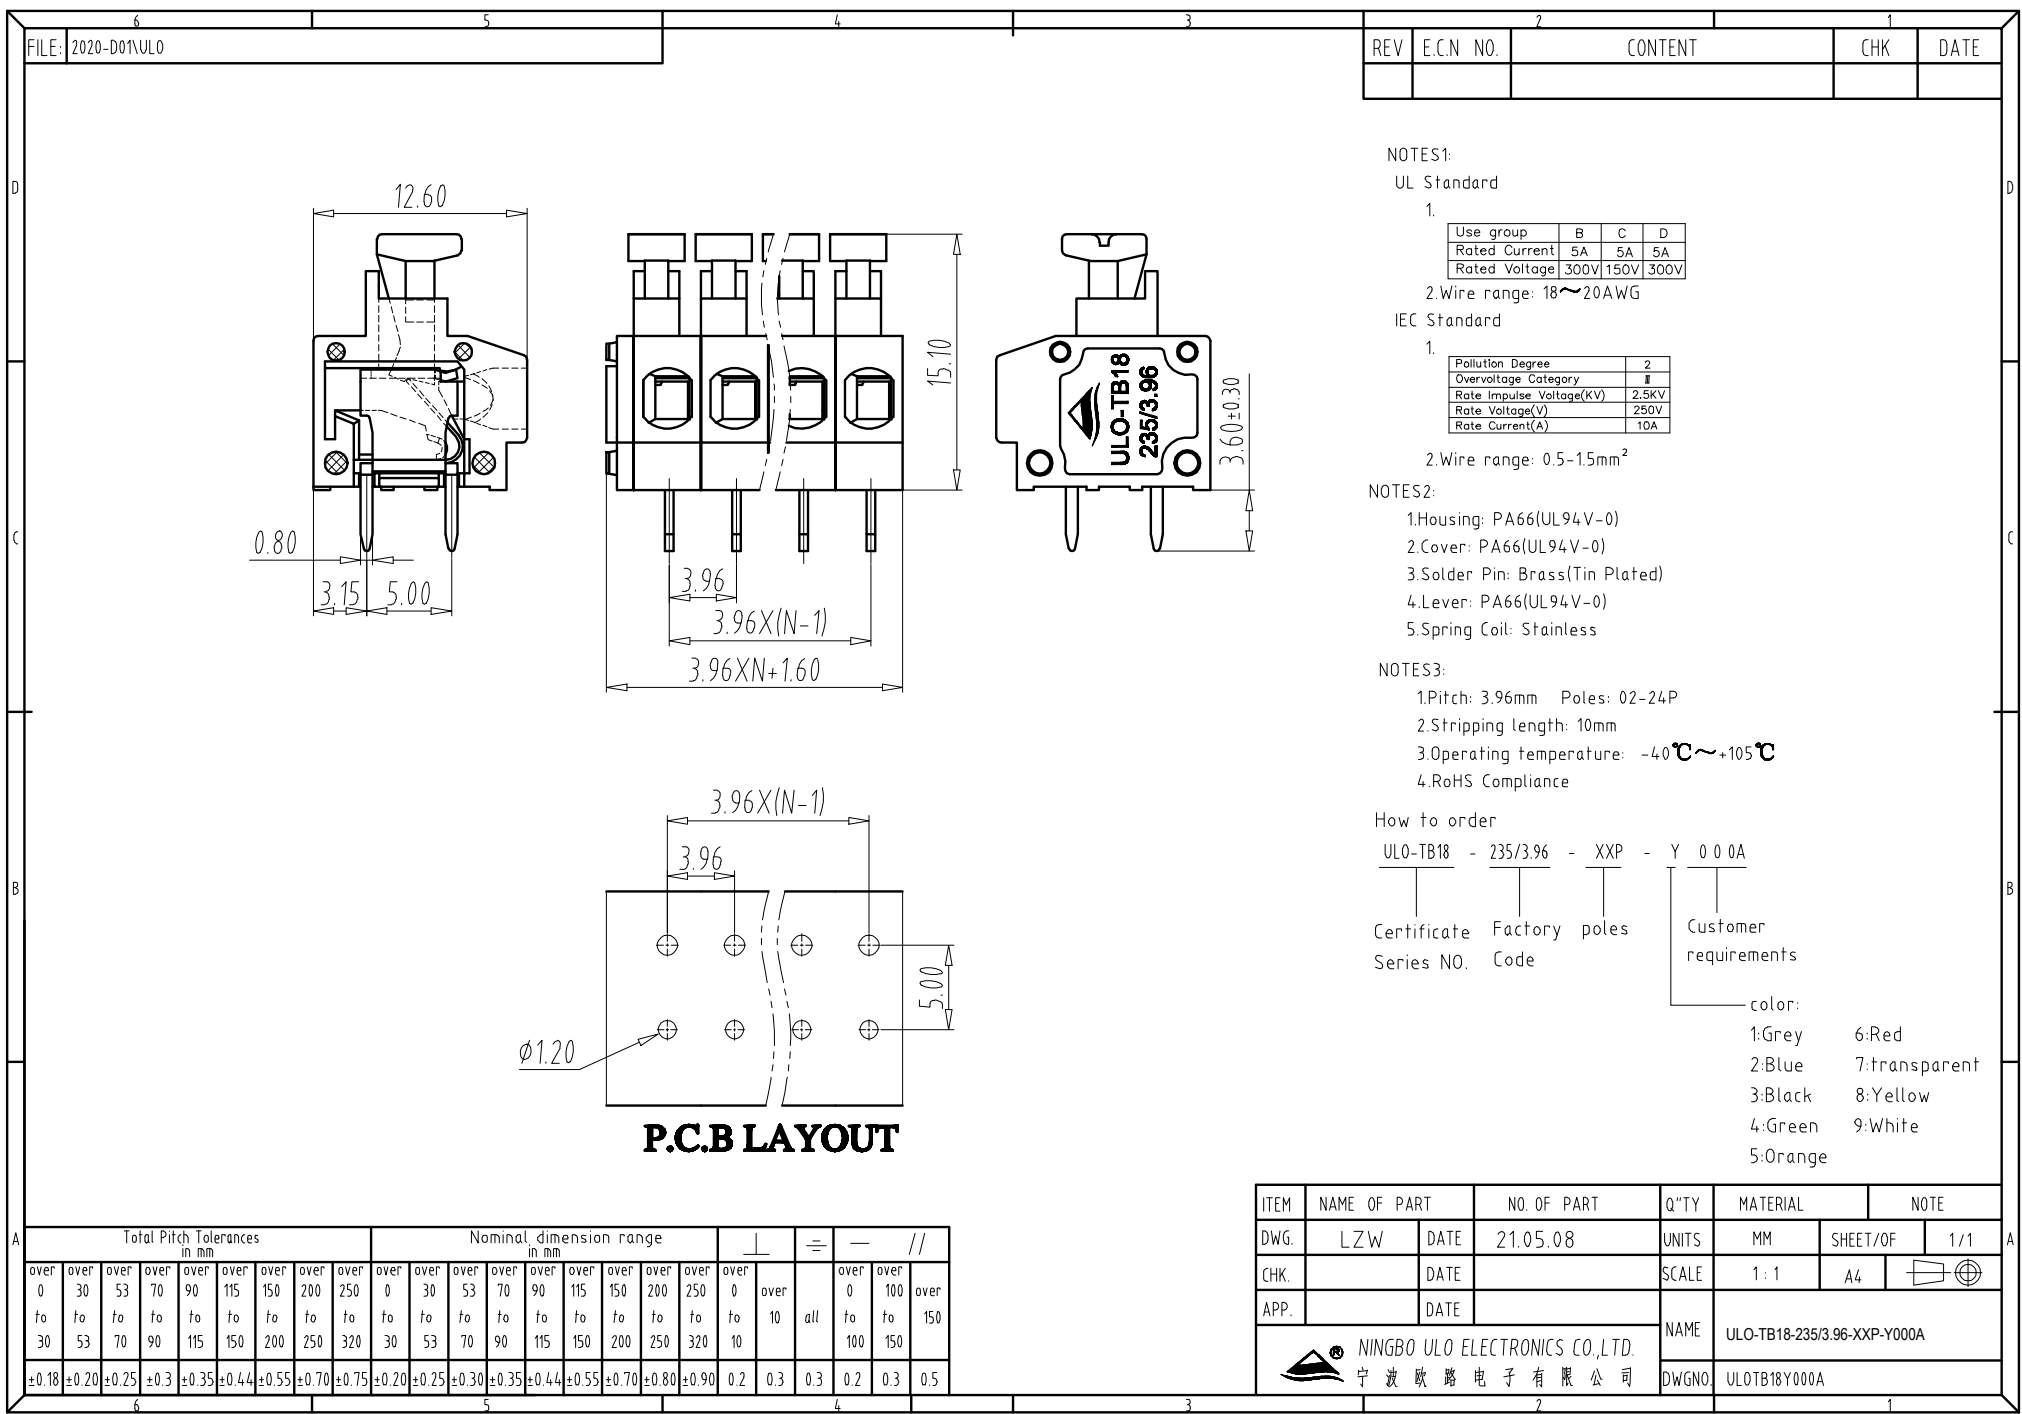

FILE: 2020-D01\ULO

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	5A	5A	5A
Rated Voltage	300V	150V	300V

2.Wire range: 18~20AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	10A

2.Wire range: 0.5-15mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Cover: PA66(UL94V-0)
- 3.Solder Pin: Brass(Tin Plated)
- 4.Lever: PA66(UL94V-0)
- 5.Spring Coil: Stainless

NOTES3:

- 1.Pitch: 3.96mm Poles: 02-24P
- 2.Stripping length: 10mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

ULO-TB18 - 235/3.96 - XXP - Y 0 0 0 A

Certificate Series NO. Factory Code poles Customer requirements

color:

- 1:Grey
- 2:Blue
- 3:Black
- 4:Green
- 5:Orange
- 6:Red
- 7:transparent
- 8:Yellow
- 9:White

P.C.B LAYOUT

Total Pitch Tolerances in mm										Nominal dimension range in mm										$\perp$		$\equiv$	$-$	$//$	
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 0	over 10		over 0	over 100	over 150
to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10			all	to 100	to 150	to 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5		

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.08	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
NINGBO ULO ELECTRONICS CO.,LTD.				NAME	ULO-TB18-235/3.96-XXP-Y000A
宁波欧路电子有限公司				DWGNO.	ULOTB18Y000A