

FILE: 2021-D01VULO

REV	EC.N NO.	CONTENT	CHK	DATE

NOTES:

UL Standard

1. Use group	B	C	D
Rated Current	5A	5A	5A
Rated Voltage	300V/150V	300V	300V

3. Wire range: 20~18AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	I
Rate Impulse Voltage(kV)	4.0kV	4.0kV	4.0kV
Rate Voltage(V)	250V	320V	630V
Rate Current(A)	17.5A	17.5A	17.5A

2. wire range: 0.2-2.5mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Cover: PA66(UL94V-0)
- 3.Lever: PA66(UL94V-0)
- 4.Spring Coil: Stainless
- 5.Solder Pin: Brass(Tin Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Stripping length: 10mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order





ULO-TB18 - 235/5.08 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

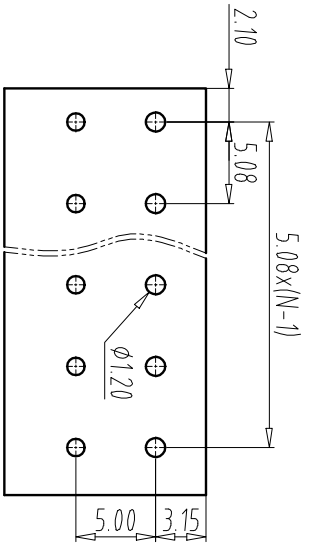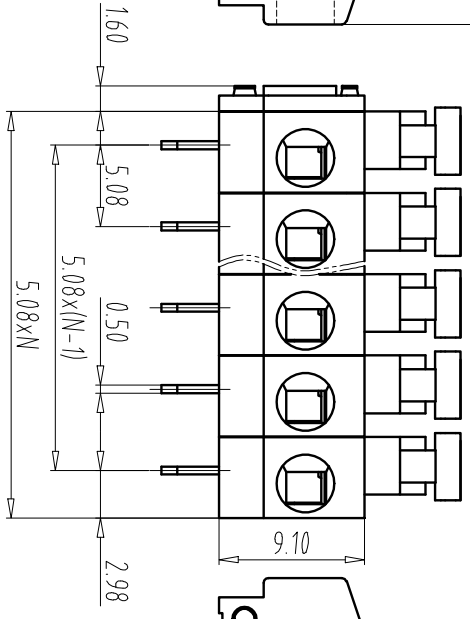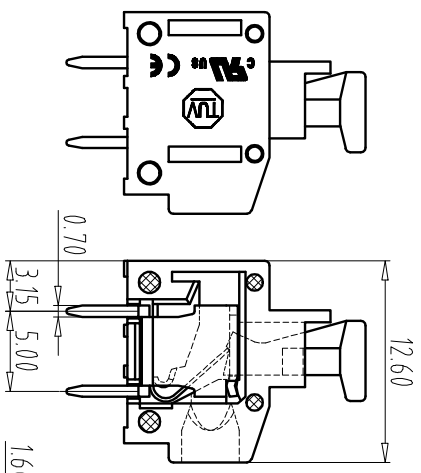

Total Pitch Tolerances										Nominal dimension range										—	//
in mm										in mm											
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over		
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over		
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	0	100
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	to	100	150
±0.18±0.20±0.25±0.3±0.35±0.44±0.55±0.70±0.75±0.20±0.25±0.30±0.35±0.44±0.55±0.70±0.80±0.90										0.20.30.30.20.30.5										0.5	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.10	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	ULO-TB18-235/5.08-XXP-Y000A		
NINGBO ULO ELECTRONICS CO.,LTD.				DWGNO	ULOTB18Y000A