

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300

2. Wire range: 12~28AWG

IEC Standard

1

Pollution Degree	3	2	2
Overvoltage Category	II	II	I
Rate Impulse Voltage(kV)	-	4kV	-
Rate Voltage(V)	-	750V	-
Rate Current(A)	-	17A	-

2.wire range: 0.2-2.5mm²

NOTES:

- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Brass(Sn Plated)
- 3.Cover: PA66(UL94V-0)
- 4.Spring: Stainless steel
- 5.Clipboard: PA66(UL94V-0)

NOTES3

- 1.Pitch: 10.16mm Poles: 01-16P
- 2.Stripping length: 5-6mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance





How to order

UL0-TB45 - 245/10.16 - XXP - Y 0000A

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

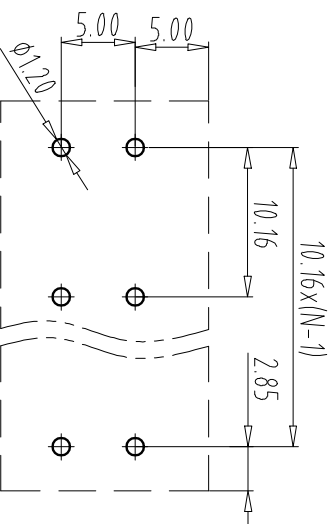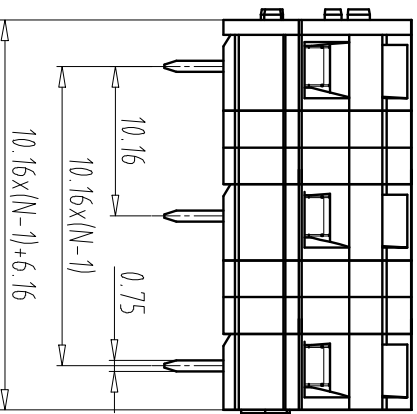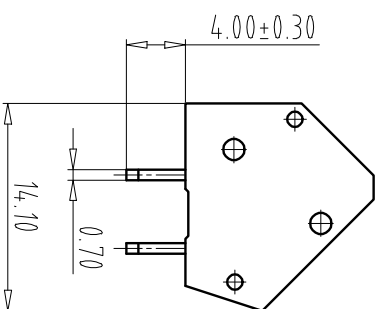

PCB LAYOUT

A	Total Pitch Tolerances in mm	Nominal dimension range in mm	Tolerance in mm	Surface texture in mm
1	0.05	0.05	0.05	0.05
2	0.05	0.05	0.05	0.05
3	0.05	0.05	0.05	0.05
4	0.05	0.05	0.05	0.05
5	0.05	0.05	0.05	0.05
6	0.05	0.05	0.05	0.05
7	0.05	0.05	0.05	0.05
8	0.05	0.05	0.05	0.05
9	0.05	0.05	0.05	0.05
10	0.05	0.05	0.05	0.05
11	0.05	0.05	0.05	0.05
12	0.05	0.05	0.05	0.05
13	0.05	0.05	0.05	0.05
14	0.05	0.05	0.05	0.05
15	0.05	0.05	0.05	0.05
16	0.05	0.05	0.05	0.05
17	0.05	0.05	0.05	0.05
18	0.05	0.05	0.05	0.05
19	0.05	0.05	0.05	0.05
20	0.05	0.05	0.05	0.05
21	0.05	0.05	0.05	0.05
22	0.05	0.05	0.05	0.05
23	0.05	0.05	0.05	0.05
24	0.05	0.05	0.05	0.05
25	0.05	0.05	0.05	0.05
26	0.05	0.05	0.05	0.05
27	0.05	0.05	0.05	0.05
28	0.05	0.05	0.05	0.05
29	0.05	0.05	0.05	0.05
30	0.05	0.05	0.05	0.05
31	0.05	0.05	0.05	0.05
32	0.05	0.05	0.05	0.05
33	0.05	0.05	0.05	0.05
34	0.05	0.05	0.05	0.05
35	0.05	0.05	0.05	0.05
36	0.05	0.05	0.05	0.05
37	0.05	0.05	0.05	0.05
38	0.05	0.05	0.05	0.05
39	0.05	0.05	0.05	0.05
40	0.05	0.05	0.05	0.05
41	0.05	0.05	0.05	0.05
42	0.05	0.05	0.05	0.05
43	0.05	0.05	0.05	0.05
44	0.05	0.05	0.05	0.05
45	0.05	0.05	0.05	0.05
46	0.05	0.05	0.05	0.05
47	0.05	0.05	0.05	0.05
48	0.05	0.05	0.05	0.05
49	0.05	0.05	0.05	0.05
50	0.05	0.05	0.05	0.05
51	0.05	0.05	0.05	0.05
52	0.05	0.05	0.05	0.05
53	0.05	0.05	0.05	0.05
54	0.05	0.05	0.05	0.05
55	0.05	0.05	0.05	0.05
56	0.05	0.05	0.05	0.05
57	0.05	0.05	0.05	0.05
58	0.05	0.05	0.05	0.05
59	0.05	0.05	0.05	0.05
60	0.05	0.05	0.05	0.05
61	0.05	0.05	0.05	0.05
62	0.05	0.05	0.05	0.05
63	0.05	0.05	0.05	0.05
64	0.05	0.05	0.05	0.05
65	0.05	0.05	0.05	0.05
66	0.05	0.05	0.05	0.05
67	0.05	0.05	0.05	0.05
68	0.05	0.05	0.05	0.05
69	0.05	0.05	0.05	0.05
70	0.05	0.05	0.05	0.05
71	0.05	0.05	0.05	0.05
72	0.05	0.05	0.05	0.05
73	0.05	0.05	0.05	0.05
74	0.05	0.05	0.05	0.05

[illegible]

NINGBO ULO ELECTRONICS CO., LTD
宁波欧路电子有限公司

INAIL	ULU-1B45-245
DWGN0	ULOTB45Y000A

0710-10-XXF-1000A