

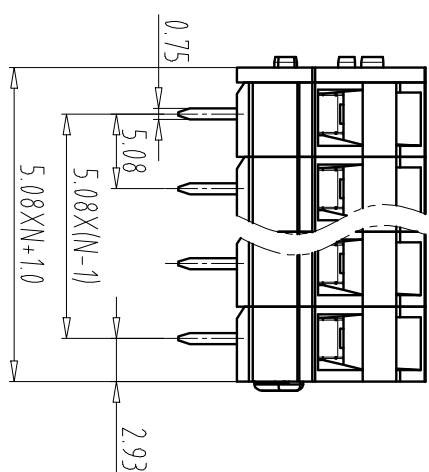
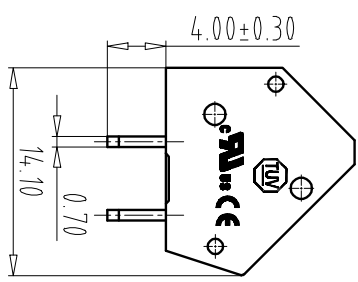


FILE: 2021-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

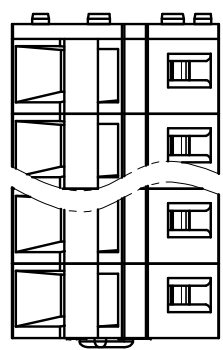

NOTES1:

UL Standard

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

2 Wire range: 12~28AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	II	II	I
Rate Impulse Voltage(KV)	4KV	4KV	4KV
Rate Voltage(KV)	320V	320V	630V
Rate Current(A)	17A	17A	17A

- NOTES2:
- 1.Housing: PA66(UL94V-0)
 - 2.Solder Pin: Brass(Sn Plated)
 - 3.Cover: PA66(UL94V-0)
 - 4.Spring: Stainless steel

- NOTES3:
- 1.Pitch: 5.08mm Poles: 02-24P
 - 2.Stripping length: 5-6mm
 - 2.Operating temperature: -40℃~+105℃
 - 3.RoHS Compliance

How to order

UL0-1B32 - 24S/5.08 - XXP - Y 0 0 0 A


Certificate Factory poles

Series NO. Code

Customer requirements


- color:
- 1:Grey
 - 2:Blue
 - 3:Black
 - 4:Green
 - 5:Orange
 - 6:Red
 - 7:transparent
 - 8:Yellow
 - 9:White

PCB LAYOUT

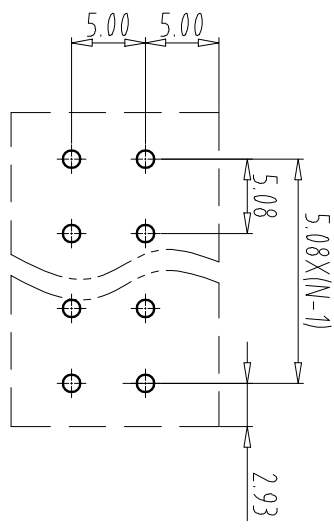

Total Pitch Tolerances		Nominal dimension range							
in mm		in mm							
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	0
to	to	to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320	30	53
to	to	to	to	to	to	to	to	to	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20
±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3
0.2	0.3	0.3	0.2	0.3	0.5				

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.27	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	UL0-1B32-24S/5.08-XXP-Y000A		



NINGBO UL0 ELECTRONICS CO., LTD.

UL01B32Y000A