
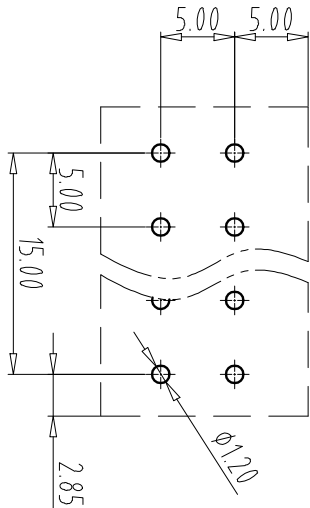
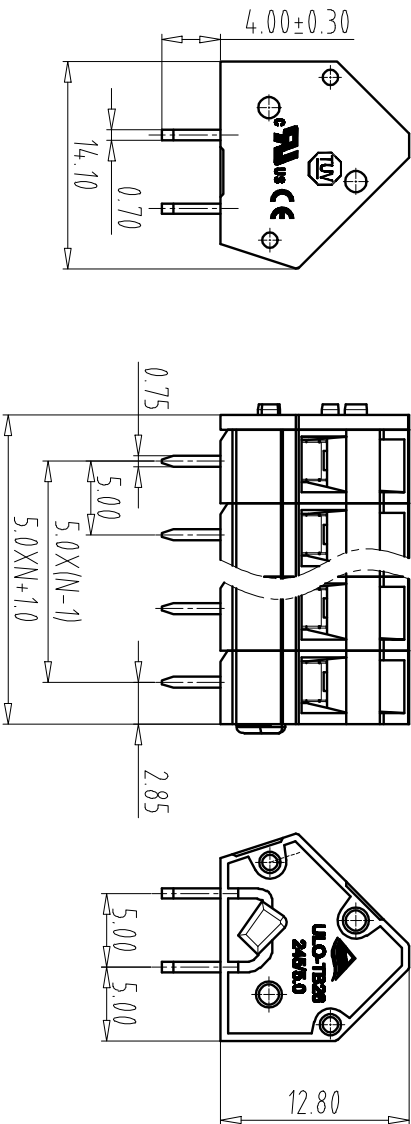


FILE: 2021-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE



PCB LAYOUT

NOTES1:
UL Standard
1 Use group B C D
Rated Current 15A 10A
Rated Voltage 300V 300V
2 Wire range: 12~28AWG
IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	I
Rate Impulse Voltage(kV)	4kV	4kV	4kV
Rate Voltage(V)	320V	320V	630V
Rate Current(A)	17A	17A	17A

NOTES2:

- 1.Housing: PA66(UL94V-0)
2.Solder Pin: Brass(Sn Plated)
3.Cover: PA66(UL94V-0)
4.Spring: Stainless steel

NOTES3:

- 1.Pitch: 5.0mm Poles: 02-24P
2.Stripping length: 5-6mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

UL0-IB26 - 24S/5.0 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code Customer requirements

color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

Total Pitch Tolerances												Nominal dimension range												T	≠	—	//
in mm												in mm															
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	100	over	0	100	over		
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to	to	to		
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	150	150	150	150	150		
+0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	22.04.14	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	UL0-IB26-24S/5.0-XXP-Y000A	DWGNO	UL0IB26Y000A



NINGBO UL0 ELECTRONICS CO.,LTD.

宁波欧路电子有限公司