

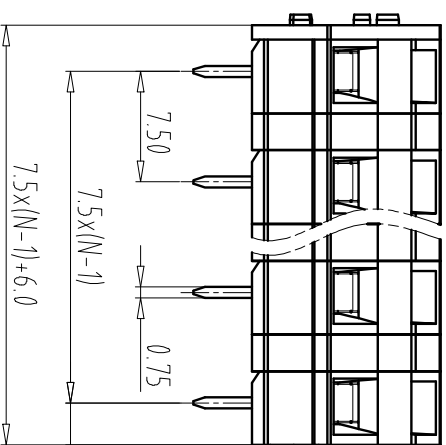
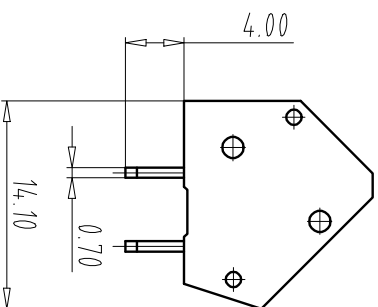


		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

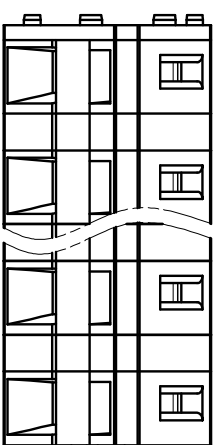

ES1:
Standard

1.

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 12~28AWG
IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	II	II	I
Rate Impulse Voltage(KV)	-	4KV	-
Rate Voltage(V)	-	750V	-
Rate Current(A)	-	17A	-

2.wire range: 0.2-2.5mm²

NOTES2

1. Housing: PA66(UL94V-0)
2. Solder Pin: Brass(Sn Plated)
3. Cover: PA66(UL94V-0)
4. Spring: Stainless steel
5. Clapboard: PA66(UL94V-0)

NOTES

- 1.Pitch: 7.5mm Poles: 02-16P
2.Stripping length: 5-6mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance


How to order

UL0-TB38 - 245/7.5 - XXP - Y 0 0 0 A

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

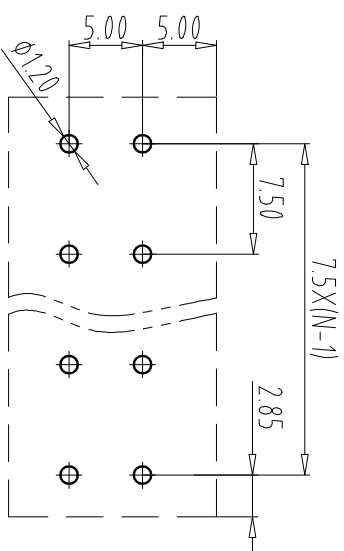

A	Total Pitch Tolerances	Nominal dimension range		=	-	//

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZ W	DATE	22.04.14	UNITS	MM	SHEET/OF 1/1

CHK.	DATE	SCALE	1 : 1	A4	
APP.	DATE				

NINGBO ULO ELECTRONICS CO.,LTD.	NAME
UL0-TB38-245/75-XXP-Y000A	

宁波欧陆电子有限公司 DWGNO. UL07B38Y000A