

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES1

UL Standard

1

Use group	B	C	D
Rated Current	8A	—	8A
Rated Voltage	300V	—	300V

2. Wire range: 14~22AWG

IEC Standard

1

Pollution Degree	3	2	2
Overvoltage Category	II	II	II
Rate Impulse Voltage(kV)	2.5kV	2.5kV	2.5kV
Rate Voltage(V)	—	250V	—
Rate Current(A)	—	8A	—

2. Wire range: 0.5-2.5mm²

NOTES2

1.Housing1: PBT(UL94V-0)

2.Housing2: PBT(UL94V-0

3.Pin header: Copper alloy/Au Plated

4.Nut1: Steel(Zn Plated)

5. Short Clamp: Bronze(Au Plated)

6.Cover1: PC(UL94V-2

7. Long Clamp: Bronze(Au Plated)

8.Screw1: Steel(Ni Plated)

9.Cover2: PC(UL94V-2

10. Screw2: Steel/Zn Plated

11. Washer: Steel/Ni Plate

12. RING: Steel(Ni Plating)

13.Nut2: Copper alloy

NOTES

1.Pitch: 7.62mm Poles: 02-24P

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3. RoHS Compliance

How to order

ULO-TB44 - 24B/1 - XXP - Y 100A

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

—color


1:Grey 6:Red

2:Blue 7:transparent

3:Black 8:Yellow

4:Green 9:White

5:Orange

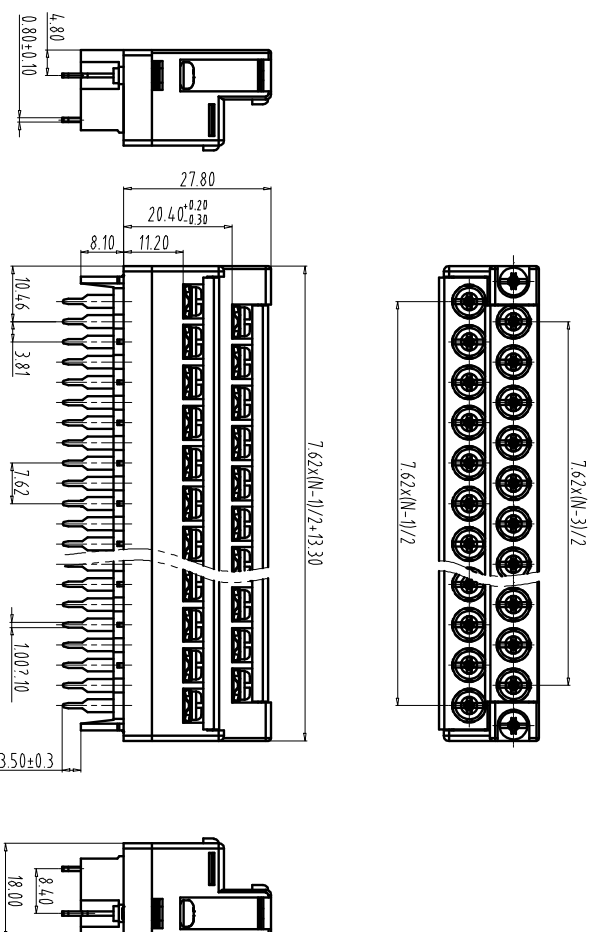

Total Pitch Tolerances	Nominal dimension range	=	-	//
A				

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL		NOTE	
DWG.	LZW	DATE	22.07.02	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1 : 1	A4	
APP.		DATE					



NINGBO ULO ELECTRONICS CO.,LTD
宁波欧路电子有限公司

DWGNO. UL0TB44Y100A