



REV	E.C.N NO.	CONTENT	CHK	DATE
		Type	Thread size (M/PG)	
		ULO-HC08-H24B-SFH-2L-M32	M32	
		ULO-HC08-H24B-SFH-2L-2M32	2M32	
		ULO-HC08-H24B-SFH-2L-M40	M40	
		ULO-HC08-H24B-SFH-2L-2M40	2M40	
		ULO-HC08-H24B-SFH-2L-PG21	PG21	
		ULO-HC08-H24B-SFH-2L-2PG21	2PG21	
		ULO-HC08-H24B-SFH-2L-PG29	PG29	
		ULO-HC08-H24B-SFH-2L-2PG29	2PG29	

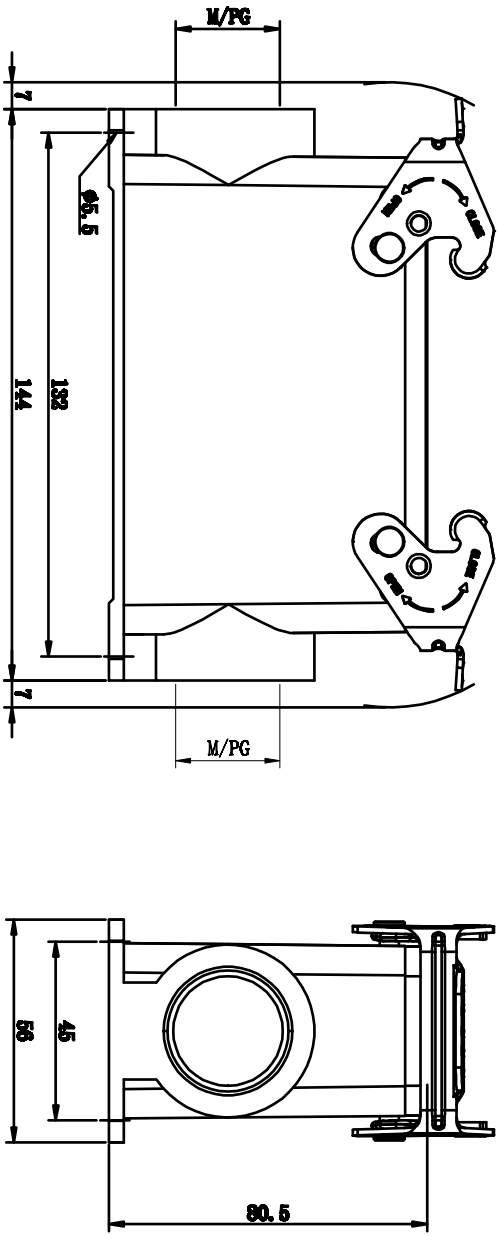

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ - +125℃
5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
6. Locking element:
locking type: double locking latch
material: metal galvanized/nickel plating
7. Cable entry: side entry
8. Thread size: M/PG
9. Hoods/Housings sealing: NBR

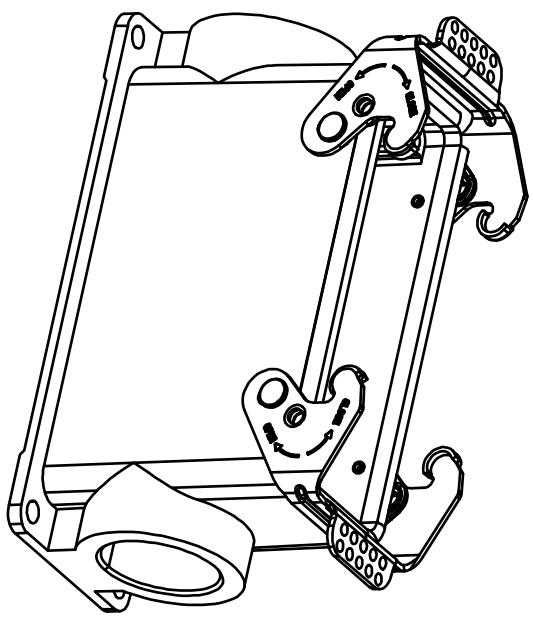

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-HC08-H24B-SFH-2L-XX		
		NINGBO ULO ELECTRONICS CO.,LTD.			
		宁波欧路电子有限公司			
		DWGNO.			