



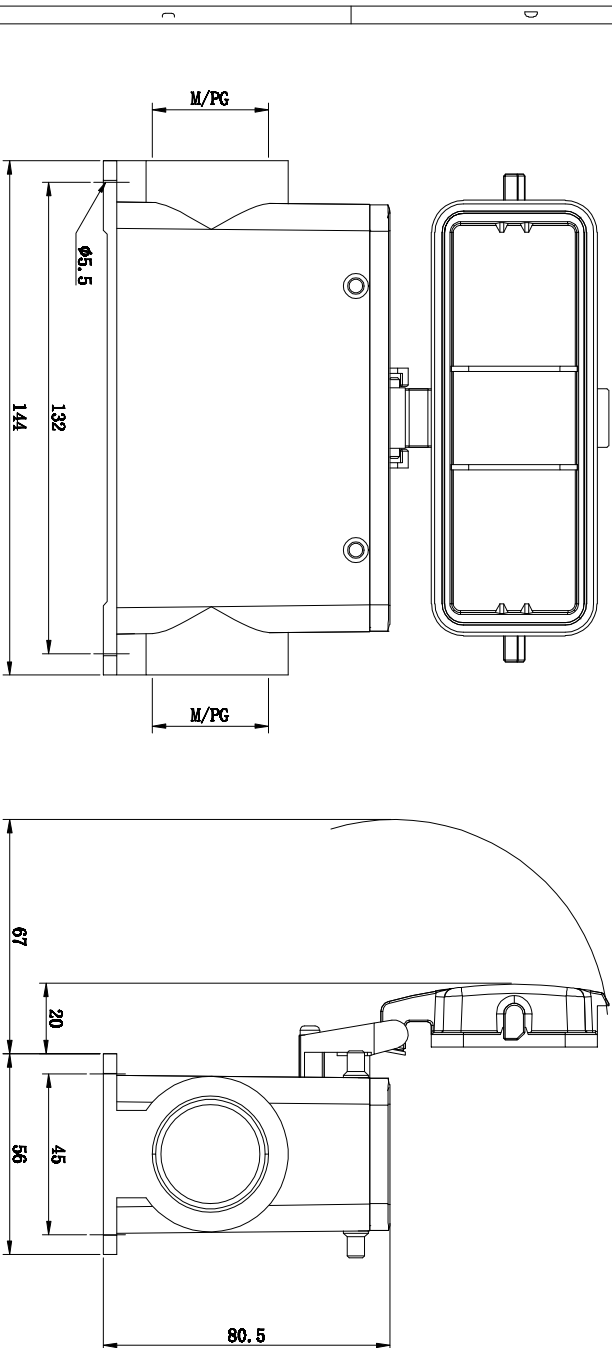

REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/PG)	
UL0-HC08-H24B-SFH-4B-MCV-M32			M32	
UL0-HC08-H24B-SFH-4B-MCV-2M32			2M32	
UL0-HC08-H24B-SFH-4B-MCV-M40			M40	
UL0-HC08-H24B-SFH-4B-MCV-2M40			2M40	
UL0-HC08-H24B-SFH-4B-MCV-PG21			PG21	
UL0-HC08-H24B-SFH-4B-MCV-2PG21			2PG21	
UL0-HC08-H24B-SFH-4B-MCV-PG29			PG29	
UL0-HC08-H24B-SFH-4B-MCV-2PG29			2PG29	

Technical specification:

1. Material: Aluminium die-cast
2. Materia, coverl: Aluminium die-cast
3. Surface: powder-coated
4. Colour: (grey)
5. Temperature range: -40℃ - +125℃
6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
7. Cable entry: side entry
8. Thread size: M/PG
9. Hoods/Housings sealing: NBR

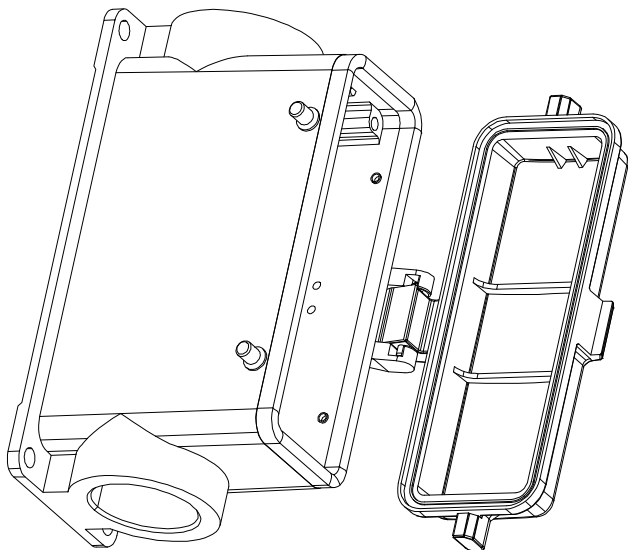

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM	SHEET/OF 1/1
CHK.	DATE			SCALE	1:1	A4
APP.	DATE			NAME		
				UL0-HC08-H24B-SFH-4B-MCV-XX		
				NINGBO UL0 ELECTRONICS CO.,LTD.		
				宁波欧路电子有限公司		
				DWGNO.		