



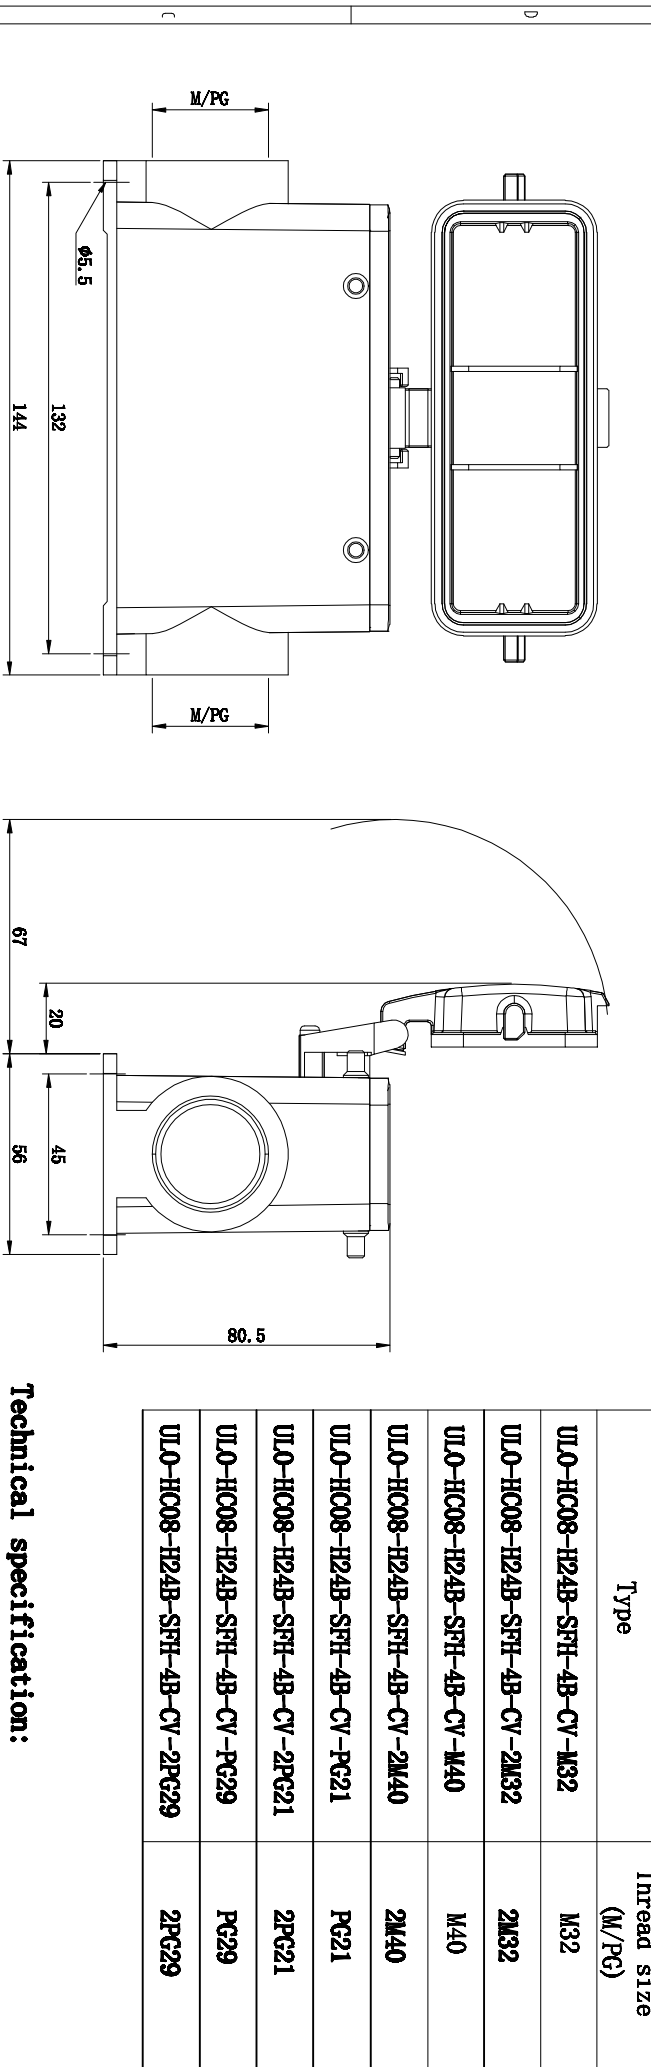

REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/PG)	
ULO-HC08-H24B-SFH-4B-CV-M32			M32	
ULO-HC08-H24B-SFH-4B-CV-2M32			2M32	
ULO-HC08-H24B-SFH-4B-CV-M40			M40	
ULO-HC08-H24B-SFH-4B-CV-2M40			2M40	
ULO-HC08-H24B-SFH-4B-CV-PG21			PG21	
ULO-HC08-H24B-SFH-4B-CV-2PG21			2PG21	
ULO-HC08-H24B-SFH-4B-CV-PG29			PG29	
ULO-HC08-H24B-SFH-4B-CV-2PG29			2PG29	

Technical specification:

1. Material: Aluminium die-cast
2. Materia, coverl: PC
3. Surface: powder-coated
4. Colour: (grey)
5. Temperature range: -40°C - +125°C
6. Degree of Protection: IP65 (acc. to IEC 60529 for coupled connector)
7. Cable entry: side entry
8. Thread size: M/PG
9. Hoods/Housings sealing: NBR

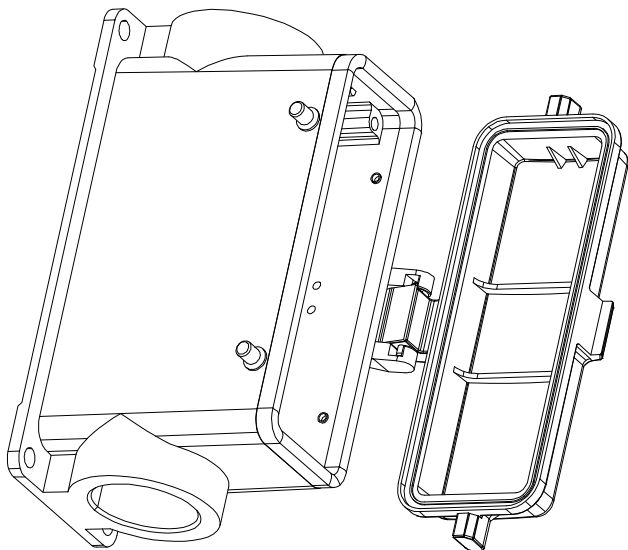

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE		
DWG.	SWL	DATE	2023.12.9	UNITS	MM	SHEET/OF	1/1	
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		ULO-HC08-H24B-SFH-4B-CV-1X				
			NAME					
			DWGNO.					
								
NINGBO ULO ELECTRONICS CO.,LTD.								
宁波欧路电子有限公司								

