



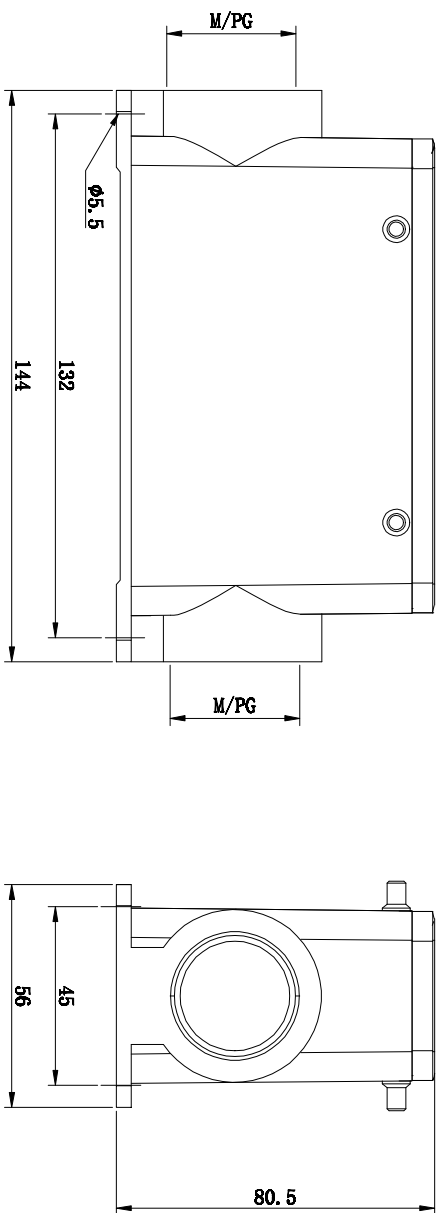

REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/PG)	
UL0-HC08-H24B-SFH-4B-M32			M32	
UL0-HC08-H24B-SFH-4B-2M32			2M32	
UL0-HC08-H24B-SFH-4B-M40			M40	
UL0-HC08-H24B-SFH-4B-2M40			2M40	
UL0-HC08-H24B-SFH-4B-PG21			PG21	
UL0-HC08-H24B-SFH-4B-2PG21			2PG21	
UL0-HC08-H24B-SFH-4B-PG29			PG29	
UL0-HC08-H24B-SFH-4B-2PG29			2PG29	

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ - +125℃
5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
6. Cable entry: side entry
7. Hoods/Housings sealing: NBR

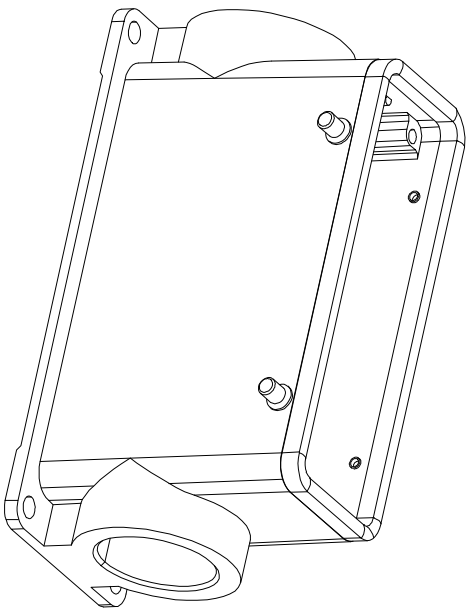

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE		
DWG.	SWL	DATE	2023.12.9	UNITS	MM	SHEET/OF 1/1	
CHK.		DATE		SCALE	1:1	A4	
APP.		DATE		NAME	ULO-HC08-H24B-SFH-4B-XX		
				NINGBO ULO ELECTRONICS CO.,LTD.			
				宁波欧路电子有限公司			
				DWGNO.			