



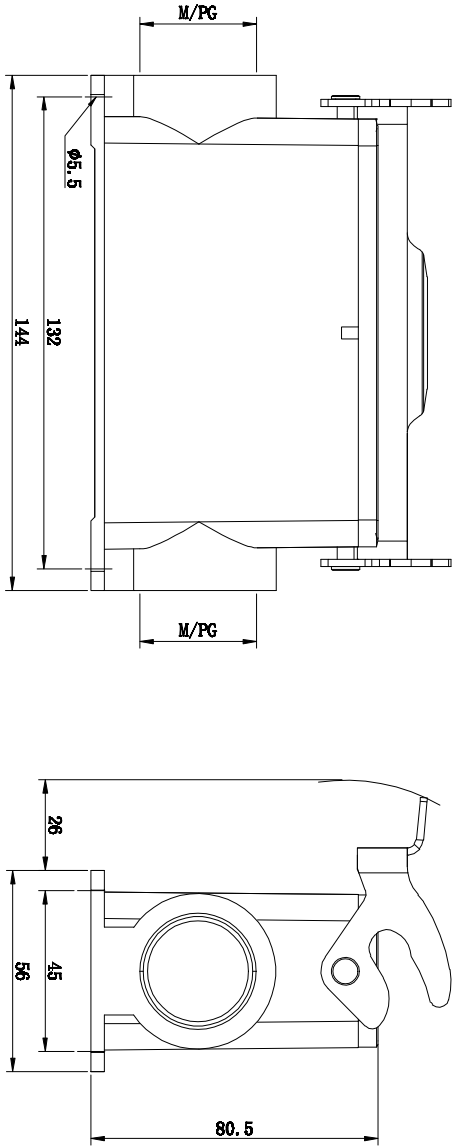

REV	E/CN NO.	2	CONTENT	1	CHK	DATE
			Type	Thread size (M/PG)		
			UL0-HC08-H24B-SFH-1L-M32	M32		
			UL0-HC08-H24B-SFH-1L-2M32	2M32		
			UL0-HC08-H24B-SFH-1L-PG21	PG21		
			UL0-HC08-H24B-SFH-1L-2PG21	2PG21		
			UL0-HC08-H24B-SFH-1L-PG29	PG29		
			UL0-HC08-H24B-SFH-1L-2PG29	2PG29		

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ - +125℃
5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
6. Locking element:
locking type: single locking latch
material: metal galvanized/nickel plating
7. Cable entry: side entry
8. Thread size: M/PG
9. Hoods/Housings sealing: NBR

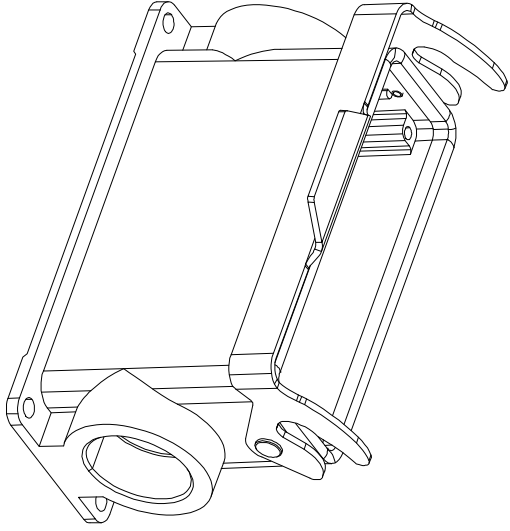

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	SWL	DATE	2023.12.9	UNITS	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	1:1	A4
APP.		DATE		NAME	UL0-HC08-H24B-SFH-1L-M32	
				DWGNO.		