



REV	E.C.N NO.	CONTENT	CHK	DATE
		Type	Thread size (M/PG)	
		UL0-HC08-H24B-SF-1L-M25	M25	
		UL0-HC08-H24B-SF-1L-2M25	2M25	
		UL0-HC08-H24B-SF-1L-PG21	PG21	
		UL0-HC08-H24B-SF-1L-2PG21	2PG21	

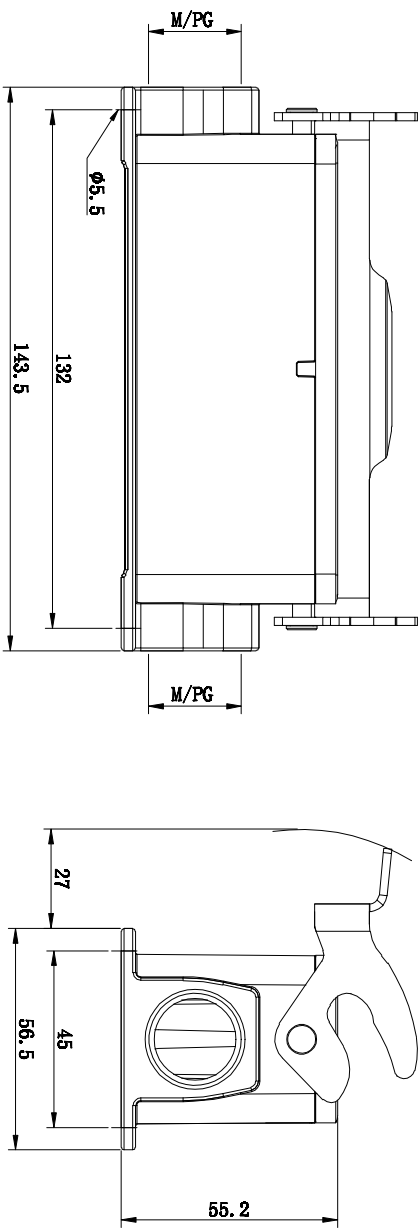

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ - +125℃
5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
6. Locking element:
locking type: single locking latch
material: metal galvanized/nickel plating
7. Cable entry: side entry
8. Thread size: M/PG
9. Hoods/housings sealing: NBR

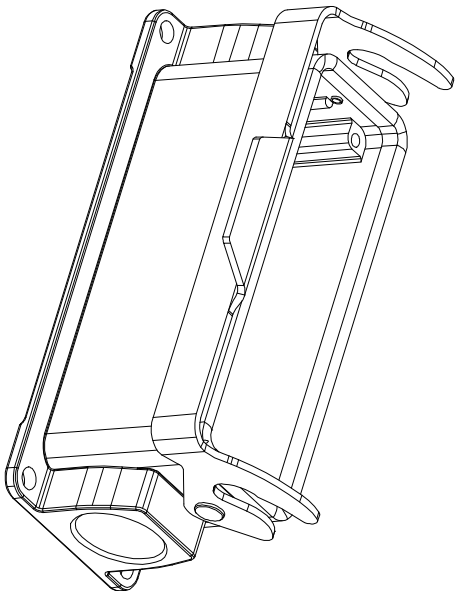

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-HC08-H24B-SF-1L-XX		
			NINGBO UL0 ELECTRONICS CO.,LTD.	DWGNO.	