

FILE: 2021-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1

Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

2.Wire range: 14~22AWG

IEC Standard

1

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	4KV	6KV	6KV
Rate Voltage(V)	400V	600V	600V
Rate Current(A)	24A	24A	24A

NOTES2:

2.Wire range: 15mm²

- 1.Housing1: PA66(UL94V-0)
2.Long Pin header: Copper alloy(Sn Plated)
3.Short Pin header: Copper alloy(Sn Plated)
4.Screw: Steel(INi Plated)
5.Cover: PC(UL94V-2)
6.Label: Paper

NOTES3:





- 1.Pitch: 7.62mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order

ULO-TB44 - 24/1/A - XXP - Y 10.0 A

Certificate Factory poles
Series NO. Code Customer requirements

- color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

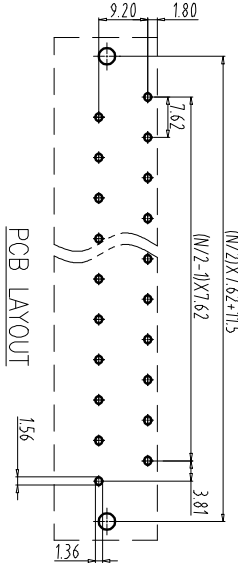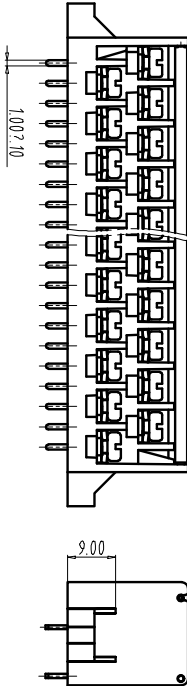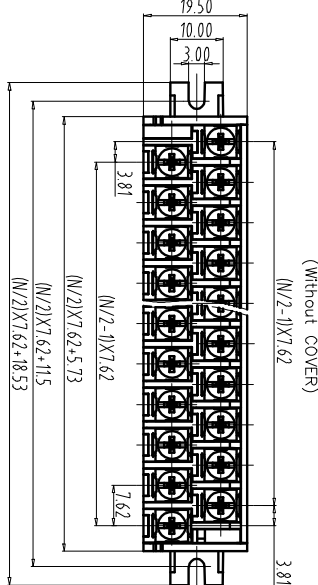

Total Pitch Tolerances	Nominal dimension range	1	=	—	//
------------------------	-------------------------	---	---	---	----

0	30	53	70	90	115	150	200	250	300	320	360	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.85	±0.90	±0.95	±1.0	±1.1	±1.2	±1.3	±1.4	±1.5	±1.6	±1.7	±1.8	±1.9	±2.0	±2.1	±2.2	±2.3	±2.4	±2.5	±2.6	±2.7	±2.8	±2.9	±3.0	±3.1

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	22.07.02	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	ULO-TB44-24/1/A-XXP-Y100A		
		NAME	ULO-TB44-24/1/A-XXP-Y100A		



NINGBO ULO ELECTRONICS CO.,LTD.

UL0TB44Y100A