


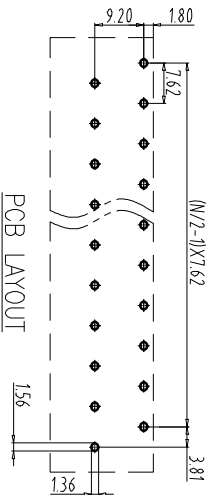
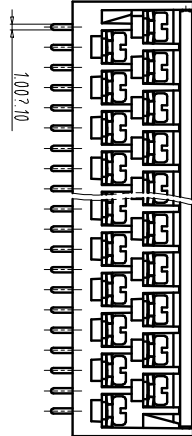


FILE: 2021-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE



(Without COVER)

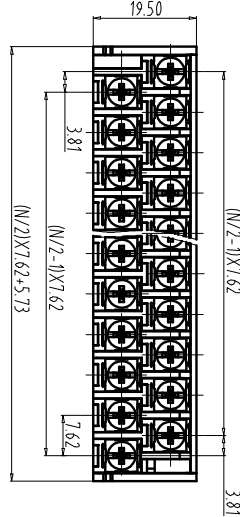

NOTES:

UL Standard

1

Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

2.Wire range: 14~22AWG

IEC Standard

1

Pollution Degree	3	2	2
Overvoltage Category	III	II	I
Rate Impulse Voltage(KV)	4KV	6KV	6KV
Rate Voltage(V)	400V	600V	600V
Rate Current(A)	24A	24A	24A

NOTES2:

2.Wire range: 15mm²

- 1.Housing1: PA66(UL 94V-0)
- 2.Long Pin header: Copper alloy(Sn Plated)
- 3.Short Pin header: Copper alloy(Sn Plated)
- 4.Screw: Steel(IN: Plated)
- 5.Cover: PC(UL 94V-2)
- 6.Label: Paper

NOTES3:

- 1.Pitch: 7.62mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

ULO-TB44 - 24/1 - XXP - Y 10 0 A


Certificate Factory poles
Series NO. Code

Customer requirements

- color:
- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

Total Pitch Tolerances		Nominal dimension range		Tolerance		Tolerance	
in mm		in mm		mm		mm	
over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200
to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70
±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	±1.00

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	22.07.02	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	ULO-TB44-24/1-XXP-Y100A		



NINGBO UL0 ELECTRONICS CO., LTD.

UL0TB44Y100A