

FILE: 2020-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES:

UL Standard

1. Use group	B	C	D
Rated Current	2A	2A	2A
Rated Voltage	300V	300V	300V

2 Wire range: 24~20AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	II	II	II
Rate Impulse Voltage(KV)	-	2KV	-
Rate Voltage(V)	-	250V	-
Rate Current(A)	-	2A	-

2. Wire range: 0.2~0.5mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Cover: PA66(UL94V-0)
- 3.Short-Pin: Phosphor bronze(Tin Plated)
- 4.Lever: PA66(UL94V-0)

NOTES3:

- 1.Pitch: 2.54mm Poles: 02-24P
- 2.Stripping length: 8.5-9.5mm
- 3 Operating temperature: -40℃~+105℃
- 4.RoHS Compliance



How to order

UL0-TB18 - 250/254 - XXP - Y 0 0 0A

Certificate Factory poles
Series NO. Code

Customer requirements
color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

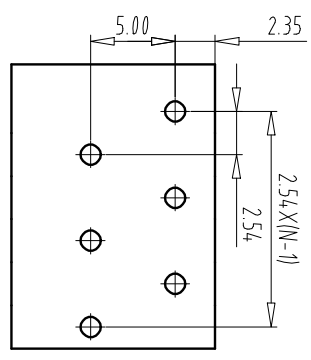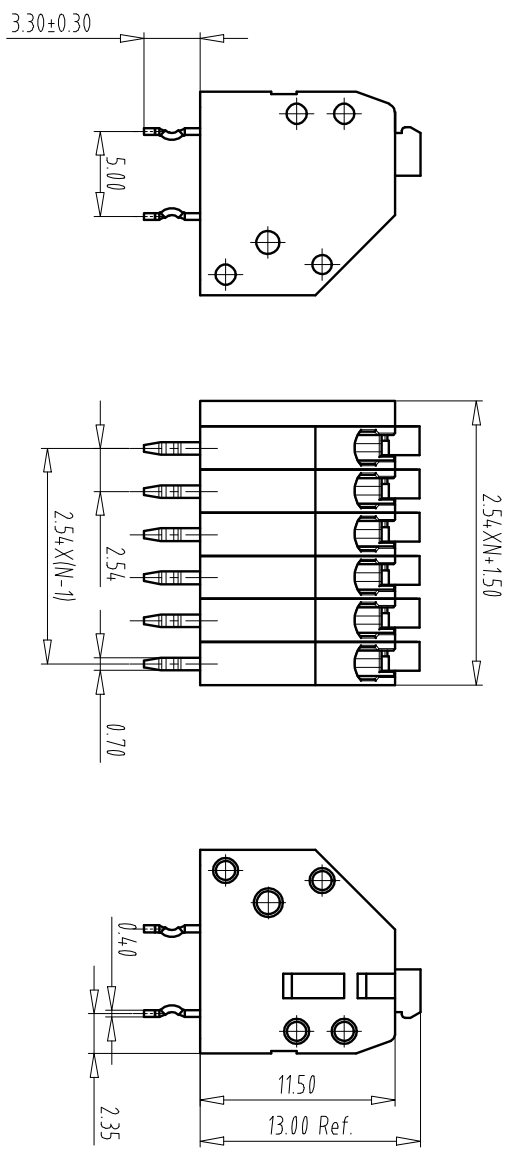

Total Pitch Tolerances		Nominal dimension range					
in mm		in mm					
over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200
to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70
±0.3	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.00

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.08	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	UL0-TB18-250/254-XXP-Y000A		



NINGBO UL0 ELECTRONICS CO.,LTD.

UL0TB18Y000A