


FILE: 2021-D01VUL0	6	5	4	3	2	1
REV	E.C.N NO.	CONTENT	CHK	DATE		

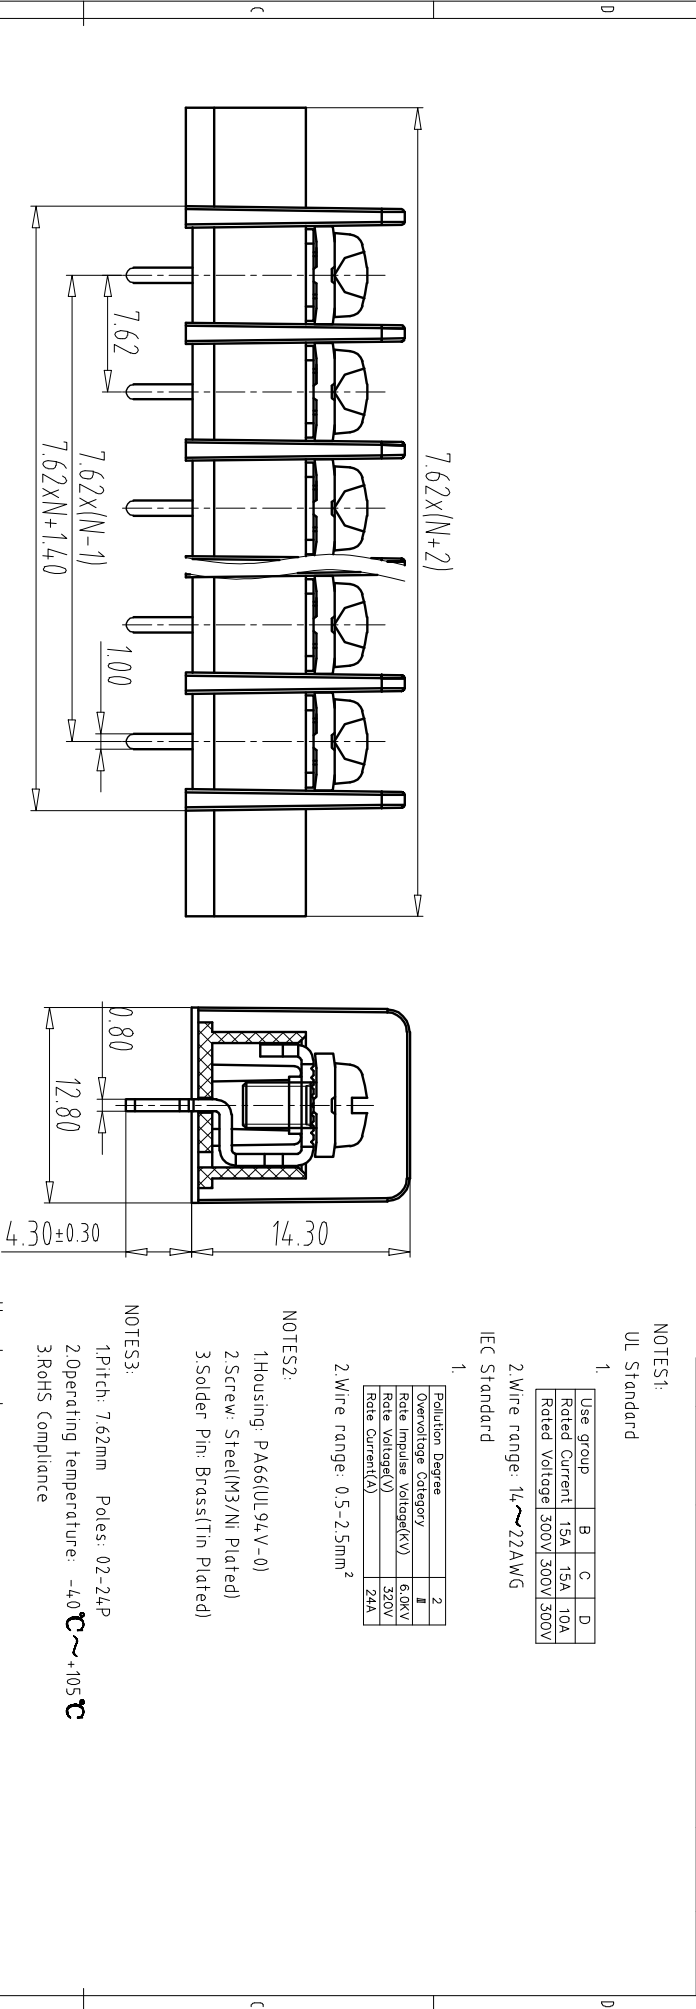

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	15A	10A
Rated Voltage	300V	300V	300V

2.Wire range: 14~22AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	6.0kV
Rate Voltage(V)	520V
Rate Current(A)	24A

2.Wire range: 0.5-2.5mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Screw: Steel(M3/Ni Plated)
- 3.Solder Pin: Brass(Tin Plated)

NOTES3:

- 1.Pitch: 7.62mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

UL0-TB44 - 25C/A - XXP - Y 100 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

Total Pitch Tolerances		Nominal dimension range																—	//
in mm		in mm																	
over	0	over	30	over	53	over	70	over	90	over	115	over	150	over	200	over	250	0	over
to	30	to	53	to	70	to	90	to	115	to	150	to	200	to	250	0	30	over	100
53	70	90	115	150	200	250	30	53	70	90	115	150	200	250	320	10	all	to	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75	±0.75
6																			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.06.15	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB44-25C/A-XXP-Y100A		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO.	UL0TB44Y100A	