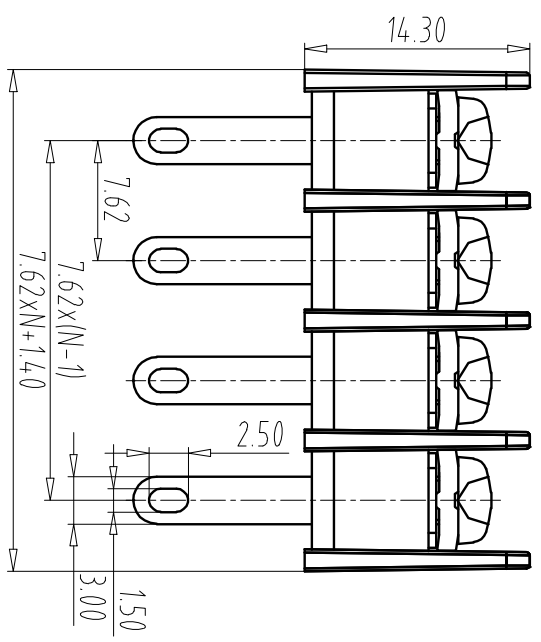
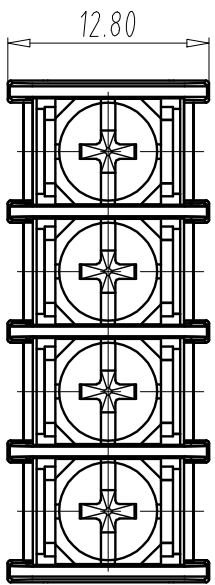


NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	15A	10A
Rated Voltage	300V	300V	300V

2. Wire range: 14~22AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate impulse voltage(kV)	2.5kV
Rate voltage(V)	300V
Rate Current(A)	24A

2. Wire range: 0.5-2.5mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Screw: Steel(M3/Ni Plated)

3.Solder Pin: Brass(Tin Plated)

NOTES3:

1.Pitch: 7.62mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

UL0-TB44 - 25H/B - XXP - Y 10 0 A

Certificate Factory poles

Series NO. Code

Customer requirements

- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

Total Pitch Tolerances										Nominal dimension range										⊥	≡	—	//
in mm										in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over				
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to				
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10					
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3				
6									5									4					

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.06.16	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	A4
APP.	DATE	NAME	UL0-TB44-25H/B-XXP-Y100A		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO.	UL0TB44Y100A	