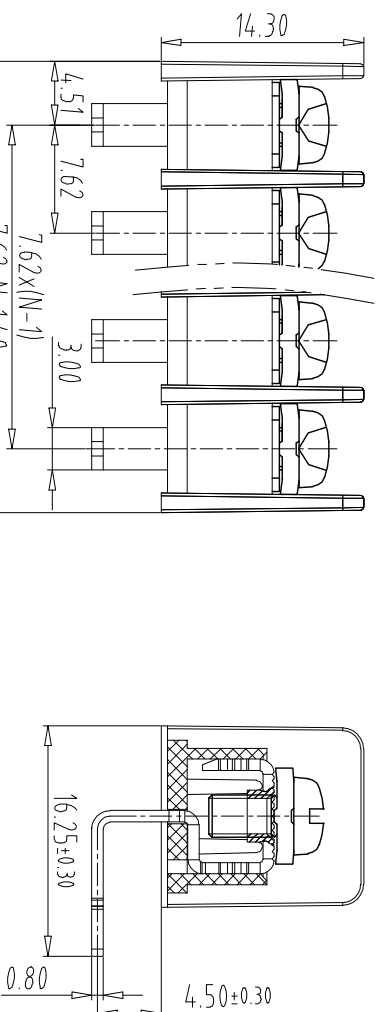

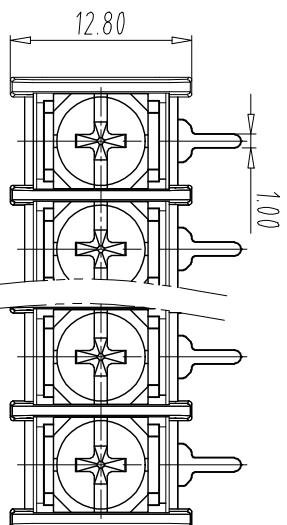


	Total PRT tolerances in mm						Nominal dimension range in mm						T	=	-	//
over	over	over	over	over	over	over	over	over	over	over	over	over	over	0	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250
+0.18±0.20	+0.25±0.3	+0.35±0.44	+0.55±0.70	+0.75±0.20	+0.25±0.30	+0.35±0.44	+0.55±0.70	+0.80±0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.5

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	LZw	DATE 21.12.09	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1 : 1	A4 
APP.		DATE	NAME	UL0-BL44-2SR/B-XXP-Y100A	
 NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			DWGNO	UL0B44-Y100A	

NOTES:

UL Standard

—

Use group	B	C	D
Rated Current	15A	15A	10A
Rated Voltage	300V	300V	300V

2. Wire range: 14~22AWG

IEC Standard

1

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	300V
Rate Current(A)	24A

2. Wire range: 0.5-2.5mm²

NOTES:

1.Housing: PA66(UL94V-0)

2.Screw: Steel(M3/Ni Plated)

3. Solder Pin: Brass (Tin Plated)

NOTES 3

1.Pitch: 7.62mm Poles: 02-24P

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3. RoHS Compliance

How to order

UL0-TB44 - 25R/B - XXP - Y 100A

Certificate Series NO.	Factory Code	Poles

Series NO. Code

Customer requirements

— color:

1:Grey
2:Blue
3:Black
4:Green
5:Orange
6:Red
7:transparent
8:Yellow
9:white

2:Blue 7:transparent

3:Black 8:Yellow

4:Green 9:White

5:Orange