
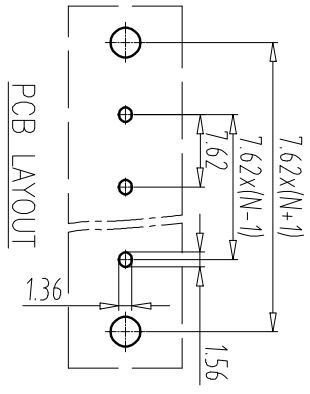
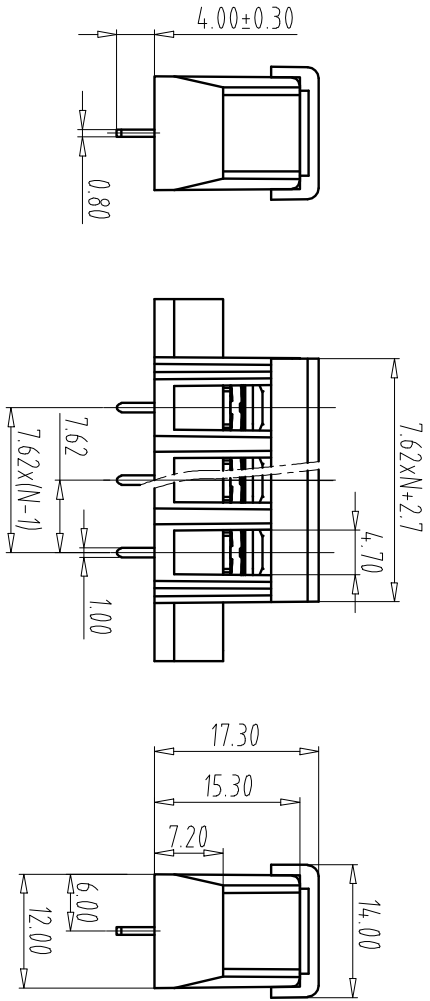


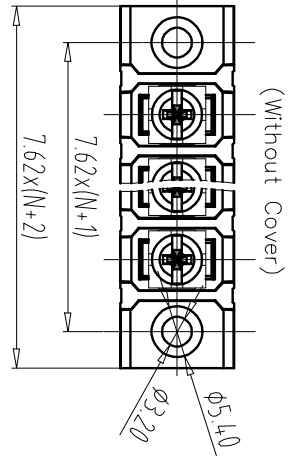

PCB LAYOUT

Total Pitch Tolerances		Nominal dimension range							
over	in mm	over	in mm	over	in mm	over	in mm	over	in mm
0	30	53	70	90	115	150	200	250	300
to	to	to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	300	350	400
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.80

NOTES:

UL Standard

Use group	B	C	D
Rated Current	15A	15A	10A
Rated Voltage	300V	150V	300V

2. Wire range: 22~14AWG

IEC Standard

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	5.0KV
Rate Voltage(V)	300V
Rate Current(A)	24A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Screw: Steel(M3/Ni Plated)
- 3.Pin header: Copper alloy(M3/Sn Plated)
- 4.Cover: PC(UL94V-2)

NOTES3:

- 1.Pitch: 7.62mm Poles: 02-24P
- 2.Stripping length: 7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

UL0-TB44 - 28C/A - XXP - Y 100 A

Certificate Factory poles
Series NO. Code

Customer requirements

- color:
- 1:Grey
 - 2:Blue
 - 3:Black
 - 4:Green
 - 5:Orange
 - 6:Red
 - 7:transparent
 - 8:Yellow
 - 9:White

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.31	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	UL0-TB44-28C/A-XXP-Y100A	UL0TB44Y100A	



NINGBO ULO ELECTRONICS CO.,LTD.