

FILE: 2021-D01VUL0




REV E.C.N NO.

CONTENT

CHK

DATE

(Without Cover)

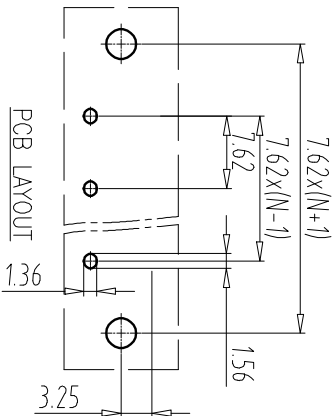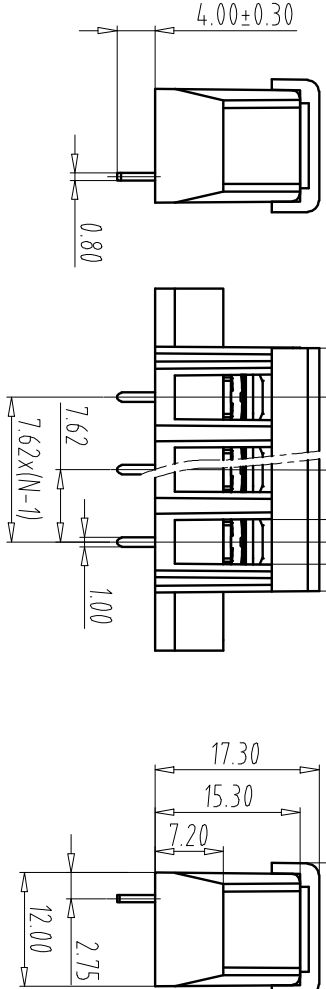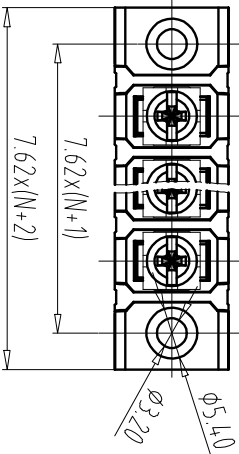

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	15A	10A
Rated Voltage	300V	150V	300V

2. Wire range: 22~14AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate impulse Voltage(kV)	5.0kV
Rate Voltage(V)	300V
Rate Current(A)	24A

NOTES2:

1.Housing: PA66(UL94V-0)

2.Screw: Steel(M3/Ni Plated)

3.Pin header: Copper alloy(M3/Sn Plated)

4.Cover: PC(UL94V-2)

NOTES3:

1.Pitch: 7.62mm Poles: 02-24P

2.Stripping length: 7mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

UL0-TB44 - 28S/A - XXP - Y 100A

Certificate Factory poles
Series NO. Code
Customer requirements

color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.31	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	UL0-TB44-28S/A-XXP-Y100A		
			UL0TB44Y100A		



NINGBO UL0 ELECTRONICS CO.,LTD.

UL0TB44Y100A