




FILE: 2021-D01VUL0

REV EC.N NO.

CONTENT

CHK DATE

(Without Cover)

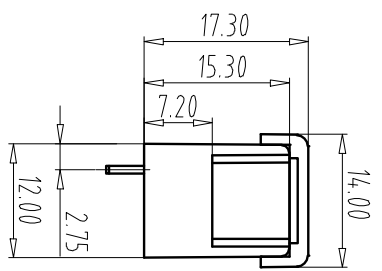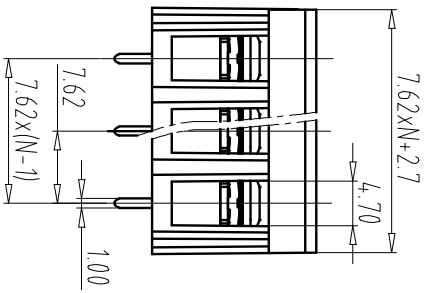

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	15A	10A
Rated Voltage	300V	150V	300V

2. Wire range: 22~14AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	5.0kV
Rate Voltage(V)	300V
Rate Current(A)	24A

NOTES2:

1.Housing: PA66(UL94V-0)

2.Screw: Steel(M3/Ni Plated)

3.Pin header: Copper alloy(M3/Sn Plated)

4.Cover: PC(UL94V-2)

NOTES3:

1.Pitch: 7.62mm Poles: 02-24P

2.Stripping length: 7mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

UL0-1B44 - 28S/B - XXP - Y 10 0 A

Certificate Factory poles
Series NO. Code
Customer requirements

color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

Total Pitch Tolerances										Nominal dimension range										±	≠	—	//
in mm										in mm													

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	30	53	70	90	115	150	200	250	30	53	70	90	10	all	0
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150			
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5
6										5										4			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.31	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	UL0-1B44-28S/B-XXP-Y100A		
NINGBO UL0 ELECTRONICS CO.,LTD.				DWGNO	UL0TB44Y100A