


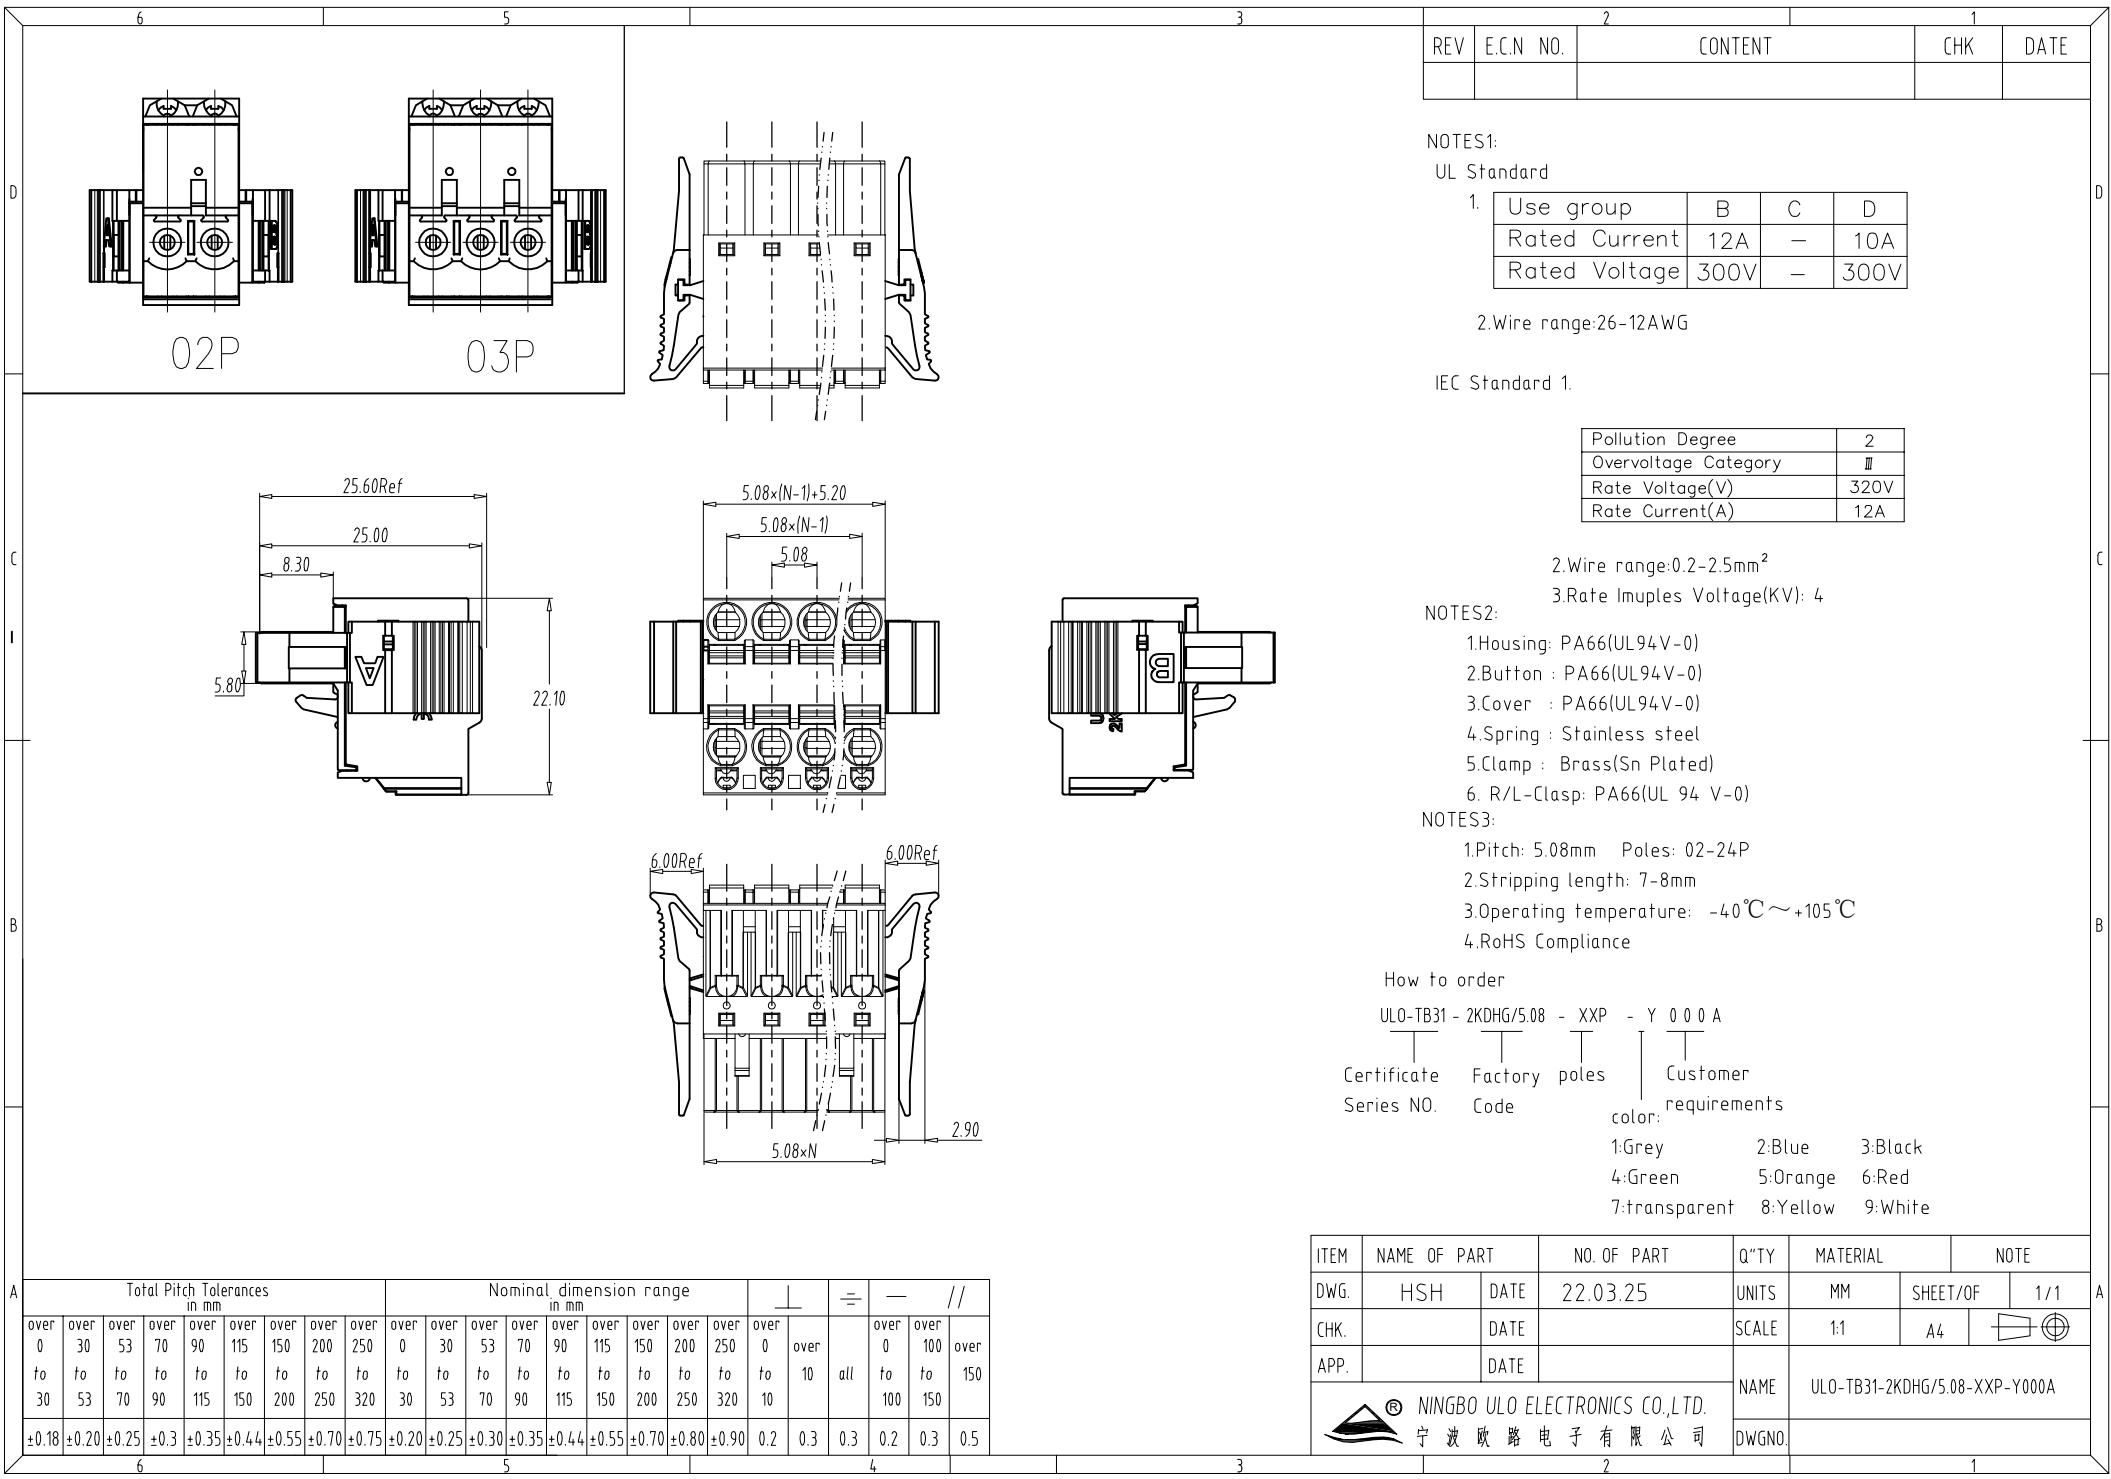

2		1	
REV	E.C.N NO.	CONTENT	CHK DATE

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	12A	—	10A
Rated Voltage	300V	—	300V

2.Wire range:26-12AWG

IEC Standard 1.

Pollution Degree	2
Overvoltage Category	III
Rate Voltage(V)	320V
Rate Current(A)	12A

2.Wire range:0.2-2.5mm²

3.Rate Imuples Voltage(KV): 4

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Button : PA66(UL94V-0)
- 3.Cover : PA66(UL94V-0)
- 4.Spring : Stainless steel
- 5.Clamp : Brass(Sn Plated)
- 6. R/L-Clasp: PA66(UL 94 V-0)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Stripping length: 7-8mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

ULO-TB31 - 2KDHG/5.08 - XXP - Y 0 0 0 A

Certificate Series NO. Factory Code poles color: Customer requirements

1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	HSB	DATE 22.03.25	UNITS	MM	SHEET/OF 1/1
CHK.	DATE	SCALE	1:1	A4	
APP.	DATE	NAME	ULO-TB31-2KDHG/5.08-XXP-Y000A		
NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			DWGNO.		