



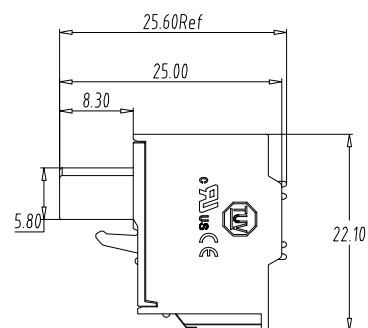


02P

03P



NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	12A	—	10A
Rated Voltage	300V	—	300V

2.Wire range:26-12AWG

IEC Standard 1.

Pollution Degree	2
Overvoltage Category	III
Rate Voltage(V)	320V
Rate Current(A)	12A

2.Wire range:0.2-2.5mm²

3. Rate Impulses Voltage (KV): 4

NOTES2:

- 1.Housing: PA66(UL94V-0)
2.Button : PA66(UL94V-0)
3.Cover : PA66(UL94V-0)
4.Spring : Stainless steel
5.Clamp : Brass(Sn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
2.Stripping length: 7-8mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

ULO-TB31 - 2KDH/5.08 - XXP - Y 0 0 0 A

Certificate Series NO.	Factory Code	poles color:	Customer requirements
---------------------------	-----------------	-----------------	--------------------------

1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	HS#	DATE	22.03.25	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	ULO-TB31-2KDH/5.08-XXP-Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.				