
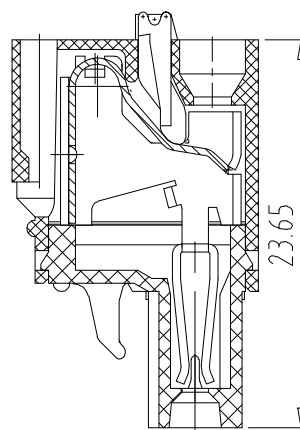
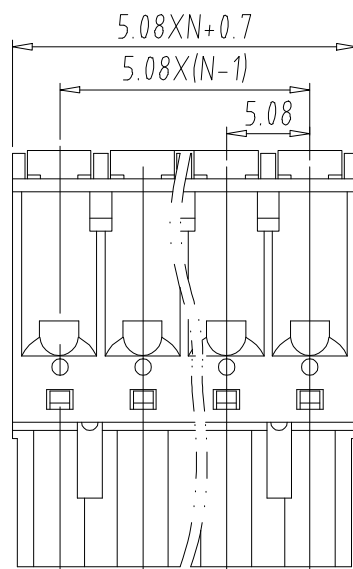


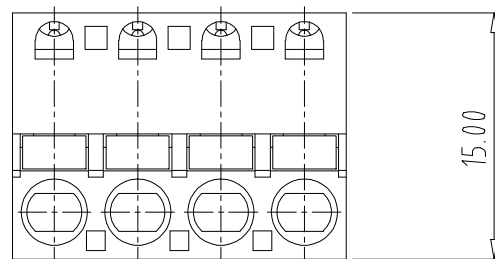

UL Standard

UL Standard

1.

Use group	B	C	D
Rated Current	10A	—	10A
Rated Voltage	300V	—	300V

2.Wire range:26-12AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	320V
Rate Current(A)	20A

2.Wire range:0.2-2.5mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Cover:PA66(UL94V-0)

3.Cage:Brass(Ni Plated)

4.Clamp:Phosphor Brons(Ni Plated)

5.Button: Material not specified

NOTES3:

1.Pitch: 5.08mm Poles: 02-24P

2.Strip length:10mm

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

How to order

ULO-TB31 - 2KD/5.08 - XXP - Y 0 0 0A

Certificate

Series NO.

Factory

Code

poles

Customer

requirements

color:

1:Grey

2:Blue

3:Black

4:Green

5:Orange

6:Red

7:transparent

8:Yellow

9:White

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.05.07	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	ULO-TB31-2KD/5.08-XXP-Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					DWGNO.	ULOTB31Y000A		