

Rated Voltage	300V	—	300V
Rated Current	12A	—	10A
Use group	B	C	D

NOTES1:
UL Standard
1. Use group B C D
Rated Current 12A — 10A
Rated Voltage 300V — 300V
2. withstanding voltage: AC1600V/1Min
3. Wire range: 24–16AWG
IEC Standard





2. wire range: 0.2~1.5mm², 0.2~2.5mm² sol

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Cover:PA66(UL94V-0)
- 3.Clamp:Phosphor Brons(Sn Plated)
- 4.Button: POM

NOTES3:

- 1.Pitch: 5.08mm Poles: (02-24)P
- 2.Stripping length: 11-12mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

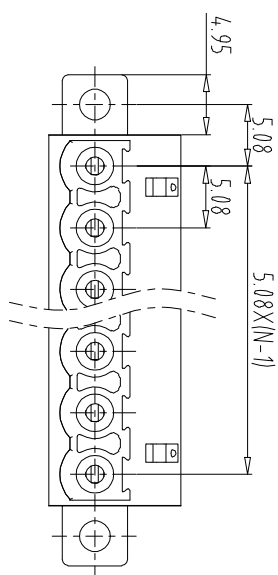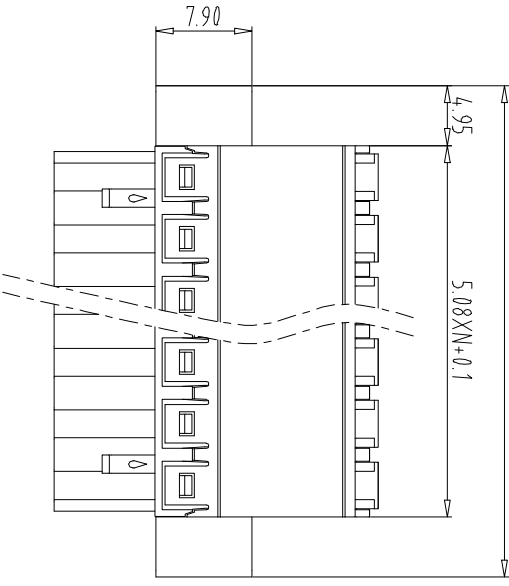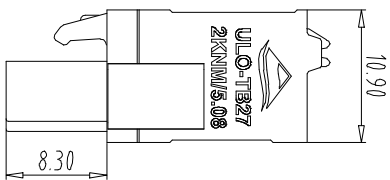

Customer requirements
color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.11.15	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-TB27-24NM/5.08-XXP-Y000A		