


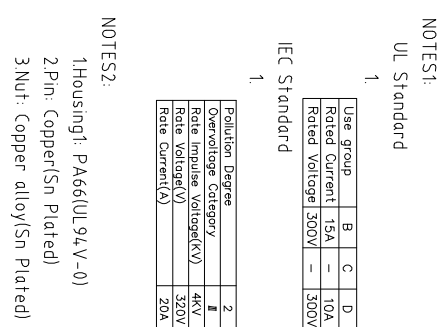

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	320V
Rate Current(A)	20A

3.Nut: Copper alloy(Sn Plated)

3. RoHS Compliance

UL0-TB27 - 2LM/5.08 - XXP - Y 0000A

Customer requirements

1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

Total Pitch Tolerances	Nominal, dimension range	—	—	//
A				

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZw	DATE 22.07.02	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1 : 1	A4 
APP.		DATE	NAME	ULO-1B27-2LM/5.08-XXP-Y000A	
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO	ULO1B27Y000A	
			宁波欧路电子有限公司		

