

—

Pollution Degree	3
Overvoltage Category	II
Rate Impulse Voltage(kV)	6kV
Rate Voltage(V)	600V
Rate Current(A)	57A

2.Pin header: Copper(Ag Plated)

3. RoHS Compliance


ULO-TB83 - 2RC/10.16 - XXP - Y 0 0 0 0 A

ULO-TB83 - 2RC/10.16 - XXP - Y 0 0 0 0 A

Customer requirements

—color:

- 1:Grey
2:Blue
3:Black
4:Green
5:Orange
6:Red
7:transparent
8:Yellow
9:white

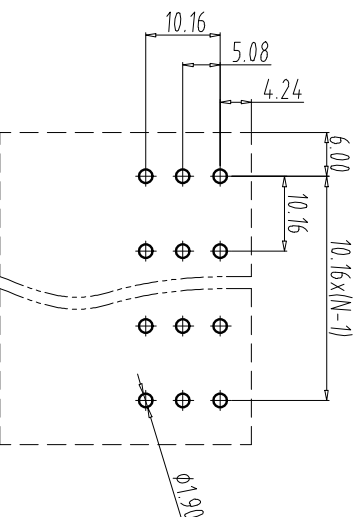

PCB LAYOUT

A		Total Fifth Tolerances										Nominal dimension range										=		//	
over	under	over	under	over	under	over	under	over	under	over	under	over	under	over	under	over	under	over	under	over	under				
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	100				
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	150				
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150	150				
$\pm 0.18 \pm 0.20$	-0.25 ± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5				

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZw	DATE	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1 : 1	A4
APP.		DATE			
NINGBO ULIO ELECTRONICS CO.,LTD.			ULIO-TB83-2R(70.16-XPB-Y000A		
宁波欧路电子有限公司			DWGNO ULIO-TB83Y000A		