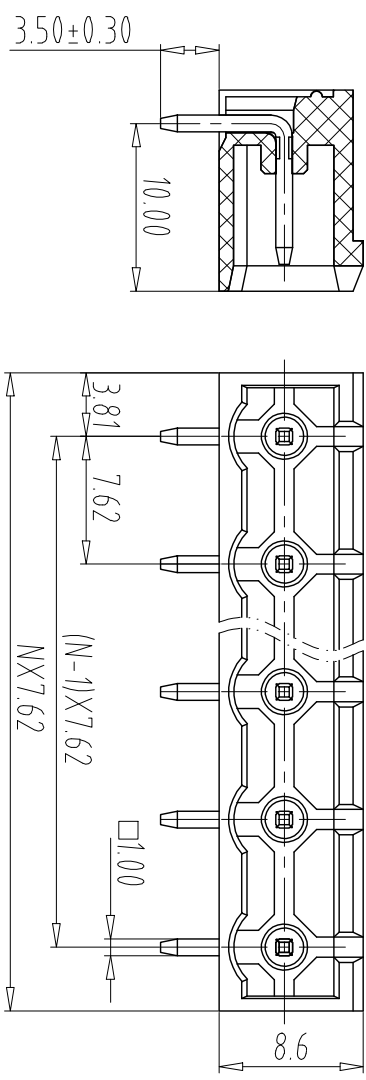
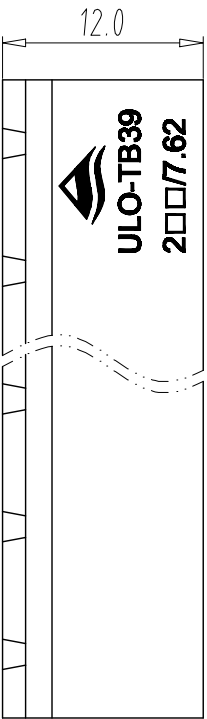


NOTES:

UL Standard

1.	Use group	B	C	D
	Rated Current	15A	-	10A
	Rated Voltage	300V	-	300V

IEC Standard

1.	Pollution Degree	2
	Overvoltage Category	II
	Rated impulse Voltage(kV)	2.5kV
	Rated Voltage(V)	400V
	Rated Current(A)	20A

NOTES2:

- 1.Housing: P A66(UL94V-0)
- 2.Solder Pin: Brass(Sn Plated)

NOTES3:

- 1.Pitch: 7.62mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

ULO-TB39 - 2RC/7.62 - XXP - Y 000 A

Certificate Factory poles
Series NO. Code requirements

- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

Total Pitch tolerances in mm												Nominal dimension range in mm												⊥	≡	—	//
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over	over		
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to		
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	0	100	100	100	150	150		
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5				
6												5															

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.12	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	ULO-TB39-2RC/7.62-XXP-Y000A		
		DWGNO.	UL0TB39Y000A		