
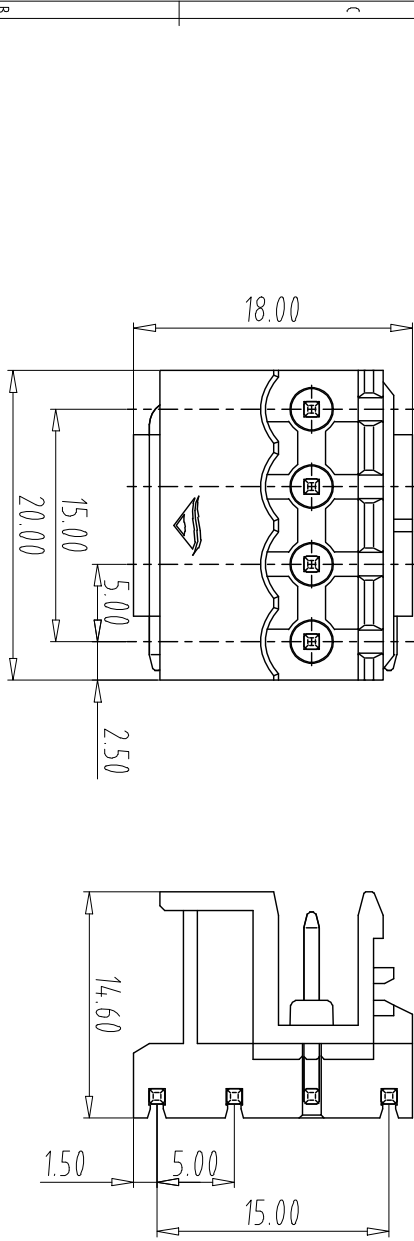


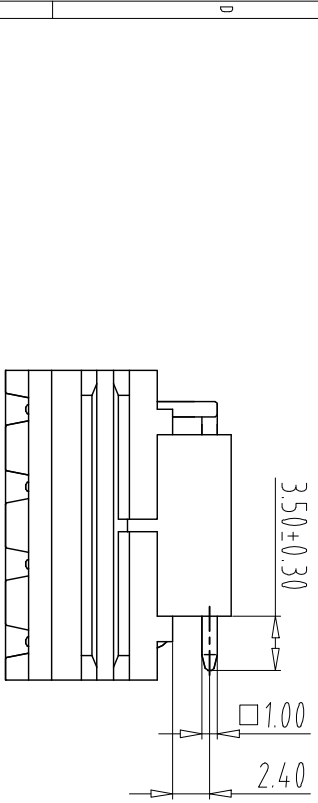

NOTES1:
UL Standard

1. Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

2.withstanding voltage: AC2000V/1Min
IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

- NOTES2:
- 1.Housing: PA66(UL94V-0)
 - 2.Solder Pin1: Copper(Sn Plated)
 - 3.Solder Pin2: Copper(Sn Plated)
 - 4.Solder Pin3: Copper(Sn Plated)
 - 5.Solder Pin4: Copper(Sn Plated)
- NOTES3:

1.Pitch: 5.0mm Poles: 04P
2.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order
UL0-TB21 - 2RF/5.0 - 04P - Y 0 0 0A

Certificate Factory poles
Series NO. Code

Customer requirements
color:

- 1:Grey
- 2:Blue
- 3:Black
- 4:Green
- 5:Orange
- 6:Red
- 7:transparent
- 8:Yellow
- 9:White

Total Pitch Tolerances											
in mm											
over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.11.15	UNITS	MM
CHK.	DATE	SCALE	1 : 1	SHEET/OF	A4 1/1
APP.	DATE	NAME	UL0-TB21-2RF/5.0-XP-Y000A		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO.	UL0TB21Y000A	