


FILE: 2021-D01VUL0

REV EC.N NO.

CONTENT

CHK DATE

10.16xN+17.76

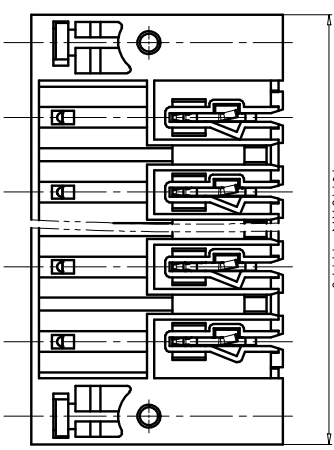

NOTES2:

- 1.Housing1: PA66(UL94V-0)
- 2.Pin header: Copper(Ag Plated)
- 3.Nut: Steel(Zn Plated)

NOTES3:

- 1.Pitch: 10.16mm Poles: 02-24P
- 2.Operating temperature: -40°C~+105°C
- 3.RoHS Compliance

How to order

UL0-TB83 - 2RM/10.16 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

- color:
- 1:Grey
 - 2:Blue
 - 3:Black
 - 4:Green
 - 5:Orange
 - 6:Red
 - 7:transparent
 - 8:Yellow
 - 9:White

PCB LAYOUT

Total Pitch Tolerances										Nominal dimension range										±	=	—	//
in mm										in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	100	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	100	150	150	
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.2	0.3	0.5	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.04.28	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	UL0-TB83-2RM/10.16-XXP-Y000A		
NINGBO UL0 ELECTRONICS CO.,LTD.				DWGNO	UL0TB83Y000A