

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

→

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0kV
Rate Voltage(V)	320
Rate Current(A)	20A

NOTES:

1.Housing: PA66(UL94V-0)

2. Solder Pin: Red copper(Sn Plated)

3.Nut: Brass

NOTES:

1.Pitch: 5.0mm Poles: 02-24P

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3. RoHS Compliance

How to order

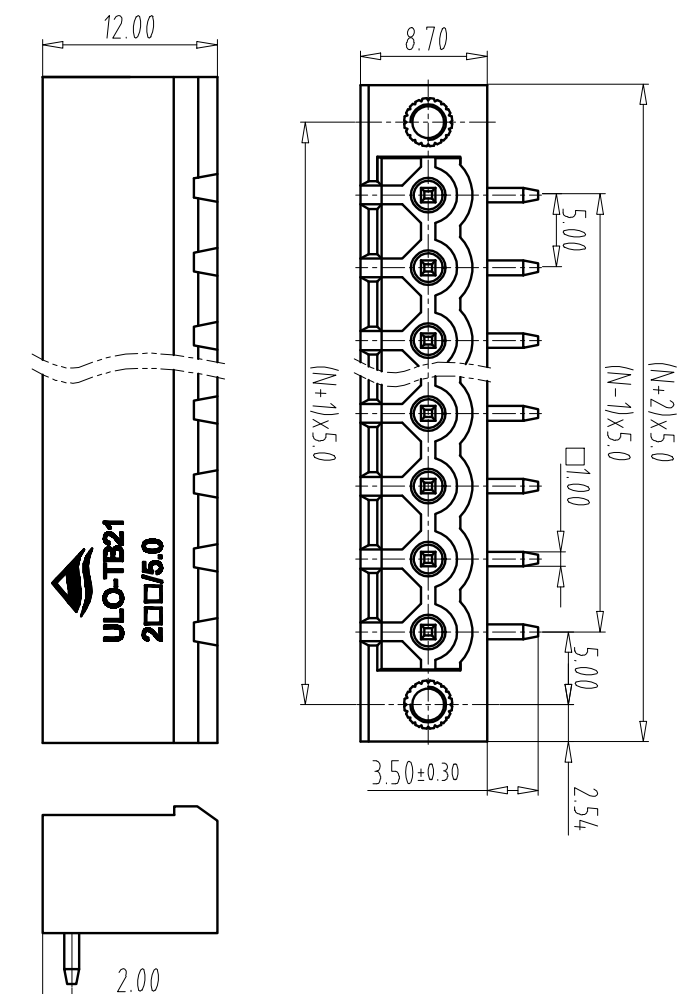
```
UL0+TB21 - ZRM/5.0 - XXP - Y 0 0 0 A
```

Certificate Series NO.	Factory Code	Poles

Customer requirements

— color:

- 1: Grey 6: Red
2: Blue 7: transparent
3: Black 8: Yellow
4: Green 9: White
5: Orange

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZw	DATE 21.05.28	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1 : 1	A4
APP.		DATE			
NINGBO ULIO ELECTRONICS CO.,LTD.			NAME		
宁波欧路电子有限公司			DWGNO		
			ULIOB21Y000A		