

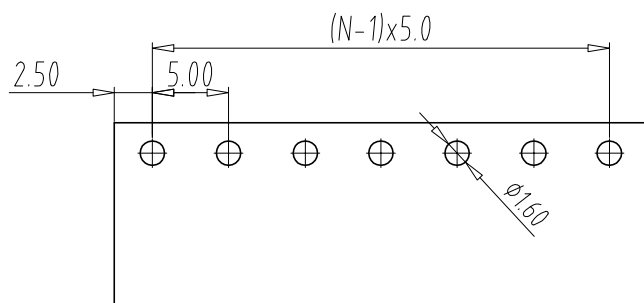
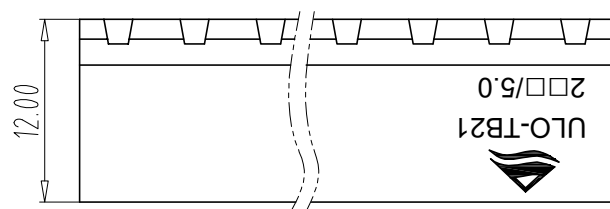


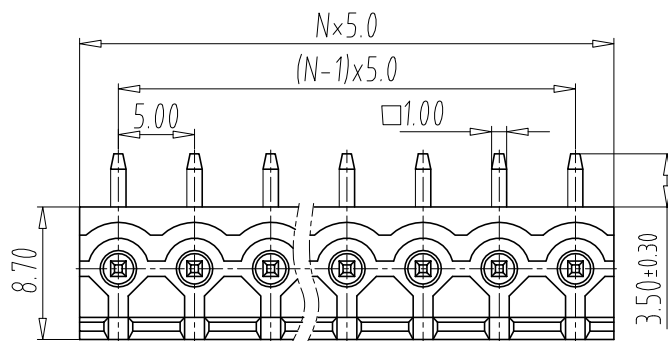

PCB Layout



NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

IEC Standard

1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

NOTES2:

1.Housing: PA66(UL94 V-0)

2.Solder Pin: Red copper(Sn Plated)

NOTES3:

1.Pitch: 5.0mm Poles: 02-24P

2.Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3.RoHS Compliance

How to order

ULO-TB21 - 2R/5.0 - XXP - Y 0 0 0 A

Certificate Series NO. Factory Code poles Customer requirements

color:

1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

A	Total Pitch Tolerances									Nominal dimension range									$\perp$		$\equiv$	$—$		$//$	
	in mm									in mm															
	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
	0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over		0	100	over	
	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	10	all	to	to	150	
	30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10			100	150		
	±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.28	UNITS	MM
CHK.		DATE		SCALE	1: 1
APP.		DATE			
			NAME	ULO-TB21-2R/5.0-XXP-Y000A	
			DWGNO.	ULOTB21Y000A	



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司