


FILE: 2021-D01UL0

REV E.C.N NO.

CONTENT

CHK

DATE

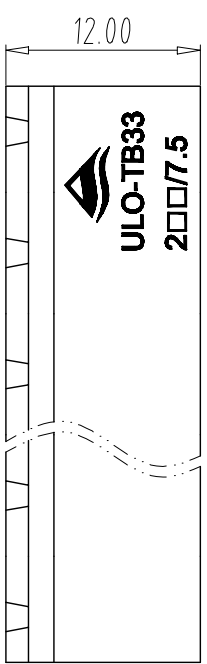

UL0-TB33
2.7/0□□

NOTES1:
UL Standard

1	Use group	B	C	D
	Rated Current	15A	-	10A
	Rated Voltage	300V	-	300V

IEC Standard


2	Pollution Degree	2
	Overvoltage Category	II
	Rate Impulse Voltage(kV)	4.0kV
	Rate Voltage(V)	400V
	Rate Current(A)	20A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Brass(Sn Plated)

NOTES3:

- 1.Pitch: 7.5mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

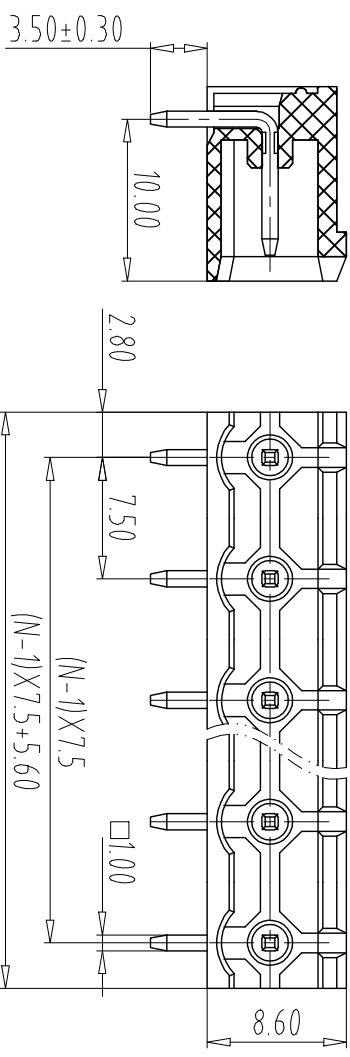

How to order

UL0-TB33 - 2R/7.5 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:white
- 5:Orange

Total Pitch Tolerances												Nominal dimension range				Tolerance				Tolerance			
in mm												in mm				in mm				in mm			

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	100	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	100	150	over	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.2	0.3	0.5	
6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.28	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB33-2R/7.5-XXP-Y000A		



NINGBO UL0 ELECTRONICS CO.,LTD.

UL0-TB33Y000A