


FILE: 2021-D01VULO

REV	EC.N NO.	CONTENT	CHK	DATE

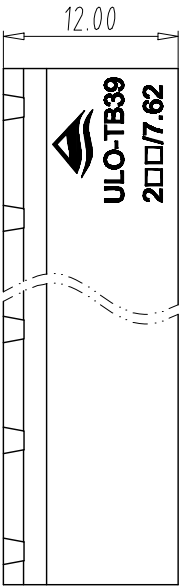

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

NOTES1:
UL Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rated impulse Voltage(kV)	4kV
Rated Voltage(V)	400V
Rated Current(A)	20A

IEC Standard

NOTES2:

- 1.Housing: PA66(UL94V-0)
2.Solder Pin: Brass(Sn Plated)

NOTES3:

- 1.Pitch: 7.62mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order



ULO-TB39 - 2R/7.62 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:white
5:Orange

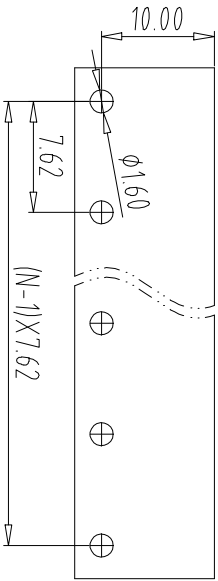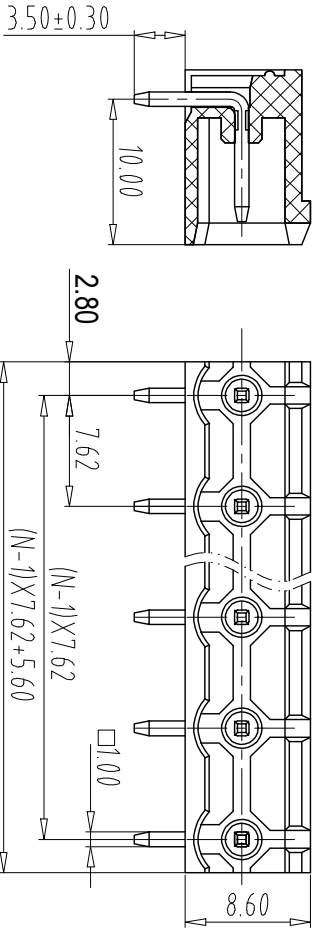

Total Pitch Tolerances	Nominal dimension range																		—	//
In mm	In mm																			

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.5
6																				



NINGBO ULO ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DWGNO: UL0TB39Y000A

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.28	UNITS	MM
CHK.	DATE		SCALE	1 : 1	A4
APP.	DATE		NAME	ULO-TB39-2R/7.62-XXP-Y000A	
			DWGNO:	UL0TB39Y000A	1/1