

		2		1	
REV	E.C.N. NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

→

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

IEC Standard

→

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	2.5kV
Rate Voltage(V)	320V
Rate Current(A)	20A

NOTES:

1.Housing: PA66(UL94V-0)

250 Solder Pin: Red copper (Sn Plated)

NOTES:

1.Pitch: 5.0mm Poles: 02-24P

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3. RoHS Compliance

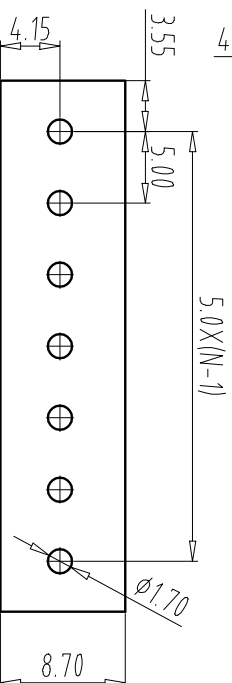
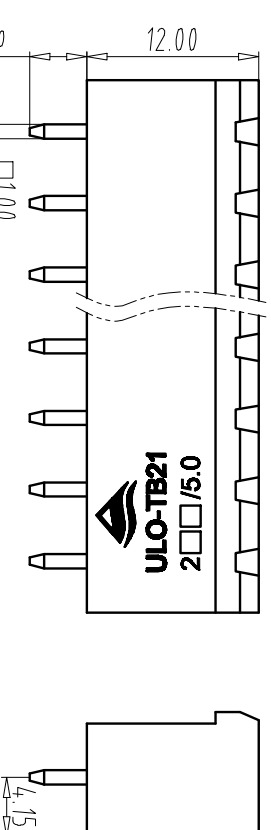
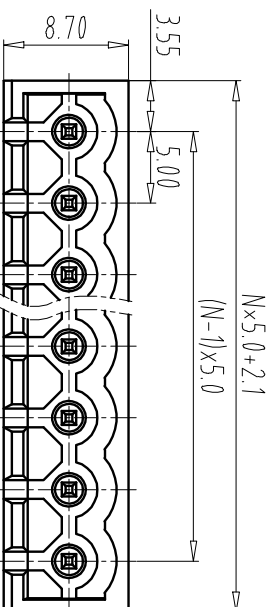
How to order

UL0-TB21 - 2VC/5.0 - XXP - Y 0000A

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

— color:

1: Grey 6: Red
2: Blue 7: transparent
3: Black 8: Yellow
4: Green 9: White
5: Orange

[illegible]

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE 21.05.27	UNITS	MM	SHEET/OF 1/1
G/K.		DATE	SCALE	1 : 1	A4
APP.		DATE			
NINGBO ULO ELECTRONICS CO.,LTD 宁波欧路电子有限公司			NAME	ULO-1B21-2VC/5.0-XXP-Y000A	
			DWGNO	ULO1B21Y000A	