


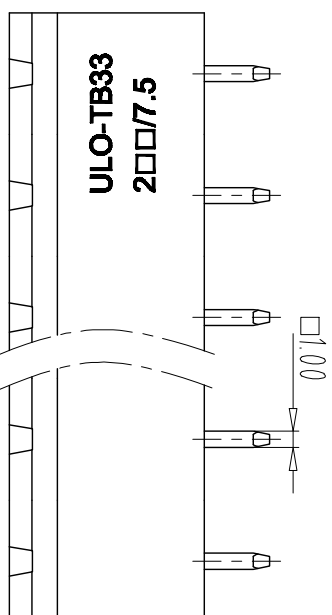

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	20A

NOTES2

- 1.Housing: PA66(UL94V-0)
2.Solder Pin: Brass(Sn Plated)

NOTES:

- 1.Pitch: 7.5mm Poles: 02~24P
2.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

UL0-TB33 - 2VC/7.5 - XXP - Y 000A

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

—color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	LZw	DATE	21.05.31	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1 : 1	A4	
APP.		DATE		NAME			
NINGBO ULIO ELECTRONICS CO.,LTD.				UL0-TB33-2VC/7.5-XXP-Y000A			
 NINGBO ULIO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.	UL0TB33Y000A		