


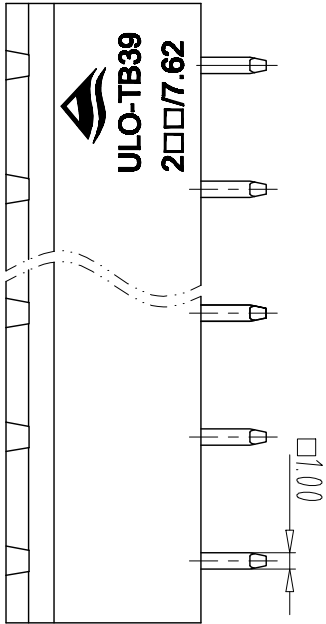

NOTES:
UL Standard

1.

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	20A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Brass(Sn Plated)

NOTES3:

- 1.Pitch: 7.62mm Poles: 02~24P
- 2.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order




ULO-TB39 - 2VC/7.62 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:


- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

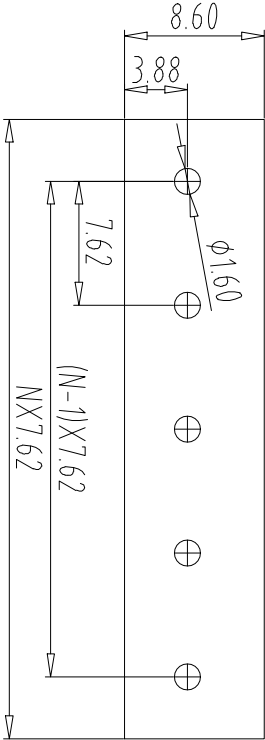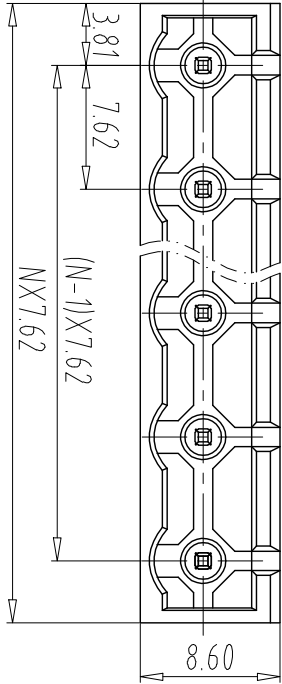

Total Pitch Tolerances	Nominal dimension range												PCB Layout			
in mm	in mm															

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80
6	5												0.2	0.3	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.31	UNITS	MM
CHK.	DATE		SCALE	1 : 1	A4
APP.	DATE		NAME	ULO-TB39-2VC/7.62-XXP-Y000A	



NINGBO ULO ELECTRONICS CO.,LTD.

UL0TB39Y000A