


FILE: 2020-D01VUL0					
REV		EC.N NO.		CONTENT	
				CHK	DATE

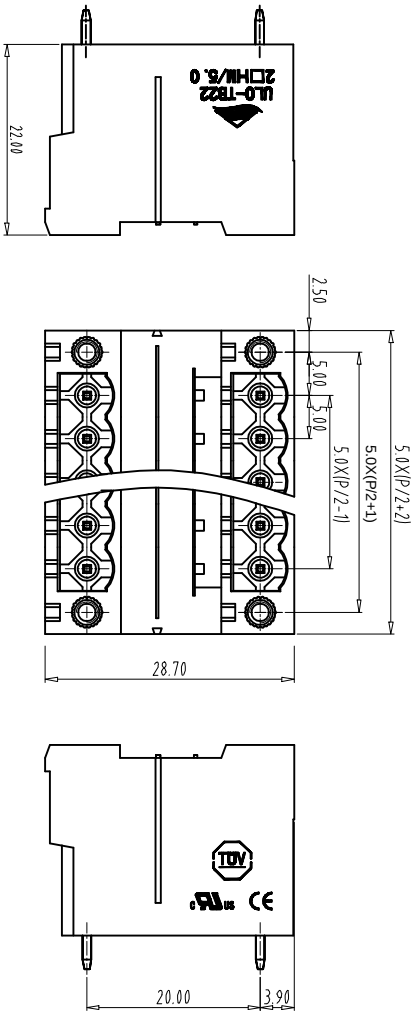

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	4.0kV
Rate Voltage(V)	320V
Rate Current(A)	10A

- NOTES2:
- 1.Housing: PA66(UL94V-0)
 - 2.Cover: PA66(UL94V-0)
 - 3.Solder Pin: Brass(Sn Plated)
 - 4.Nut: Brass

- NOTES3:
- 1.Pitch: 5.0mm Poles: 2X(02-24)p
 - 2.Operating temperature: -40℃~+105℃
 - 4.RoHS Compliance


How to order
UL0-TB22 - 2VHM/5.0 - 2xXXp - Y 0 0 0A

Certificate Factory poles
Series NO. Code requirements

Customer requirements color:

- 1:Grey
- 2:Blue
- 3:Black
- 4:Green
- 5:Orange
- 6:Red
- 7:transparent
- 8:Yellow
- 9:White

PCB Layout



Total Pitch Tolerances		Nominal dimension range					
in mm		in mm					
over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200
to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.28	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-TB22-2VHM/5.0-2xXXp-Y000A		
			DWGNO.	UL0TB22Y000A	