


FILE: 2021-D01VUL0							
REV		EC.N NO.		CONTENT		CHK	
						DATE	

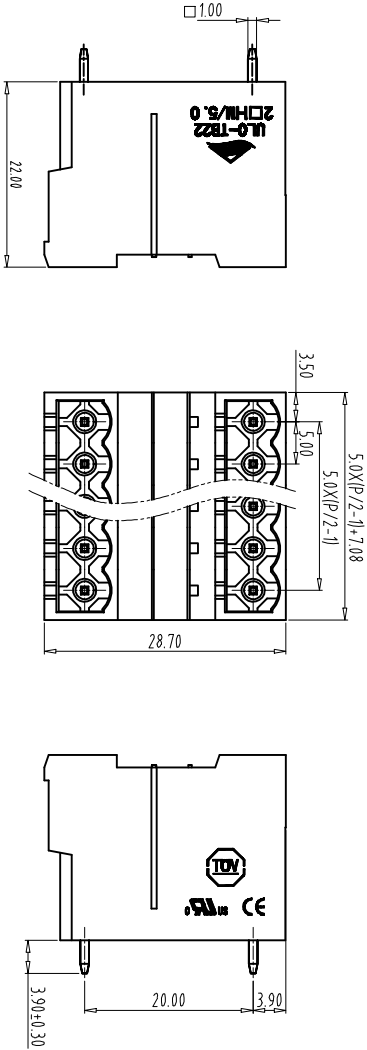

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

IEC Standard

1	2
Rated Voltage Category	40kV
Rated Impulse Voltage(kV)	320V
Rated Voltage(V)	320V
Rated Current(A)	10A

- NOTES2:
- 1.Housing: PA66(UL94V-0)
 - 2.Cover: PA66(UL94V-0)
 - 3.Solder Pin: Brass(Sn Plated)
 - 4.Nut: Brass

- NOTES3:
- 1.Pitch: 5.0mm Poles: 2X(02-24)P
 - 2.Operating Temperature: -40℃~+105℃
 - 3.RoHS Compliance

How to order


UL0-IB22 - 2VH/5.0 - 2X(XX)P - Y 0 0 0 A

Certificate Factory poles

Series NO. Code


Customer requirements

- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

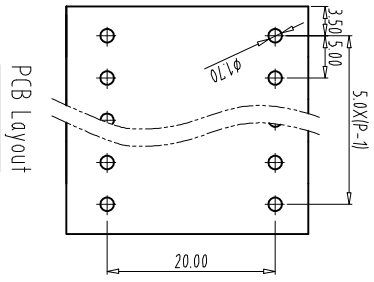

Total Pitch Tolerances		Nominal dimension range					
In mm		In mm					
over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200
to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250
to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320
to	to	to	to	to	to	to	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70
±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3
0.2	0.3	0.3	0.2	0.3	0.5		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.28	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME			
		NAME			
		UL0-IB22-2VH/5.0-2X(XX)P-Y000A			
		DWGNO.			
		UL0IB22Y000A			



NINGBO UL0 ELECTRONICS CO.,LTD.