

FILE: 2020-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current 15A	-	-	10A
Rated Voltage 300V	-	-	300V
2. Torque value: M3.0, 4.4, 3lb.in
3. Wire range: 28~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	12A

2. Torque value: M3.0, 0.5Nm
3. wire range: 0.2~2.5mm²

NOTES2:

1. Housing: PA66 (UL94V-0)
2. Cover: PA66 (UL94V-0)
3. Pin: Brass (Sn Plated)
4. Cage: Brass (Ni Plated)
5. Screw: Steel (M3.0, Zn Plated)

NOTES3:



1. Pitch: 5.08mm Poles: 02-24P
2. Stripping length: 7mm
3. Operating temperature: -40℃~+105℃
4. RoHS Compliance

How to order

UL0-TB27 - 2VKM/5.08 - XXP - Y 0 0 0A

Certificate Factory poles Customer requirements
Series NO. Code

color:
1. Grey 2. Blue 3. Black
4. Green 5. Orange 6. Red
7. transparent 8. Yellow 9. White

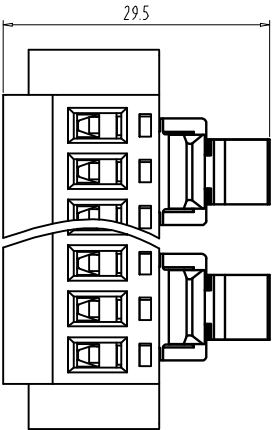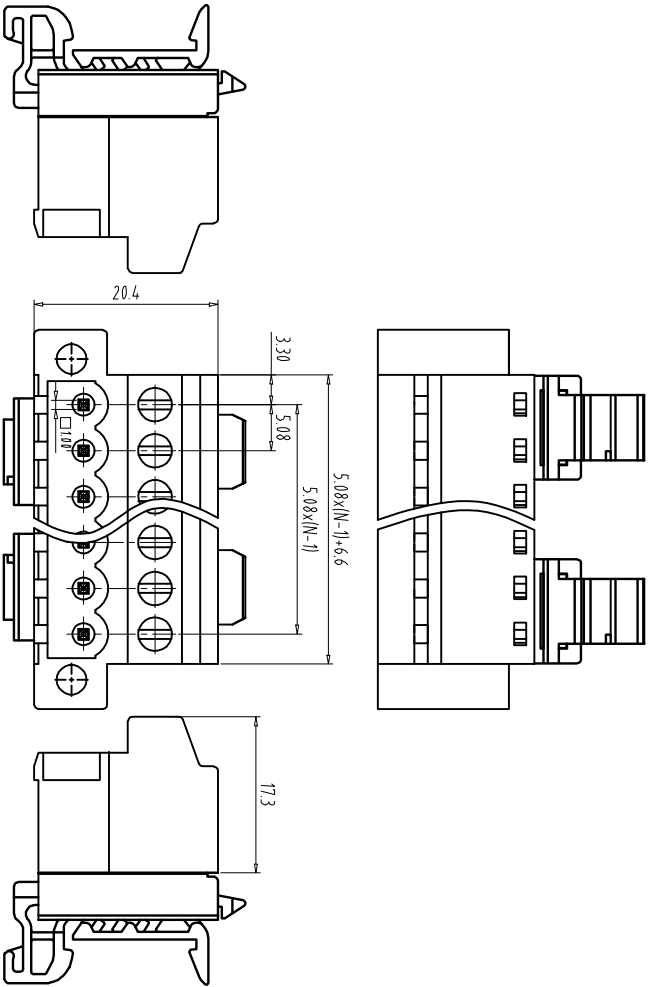

A	Total Pitch Tolerances in mm	Nominal dimension range in mm	+	±	—	///
---	---------------------------------	----------------------------------	---	---	---	-----