
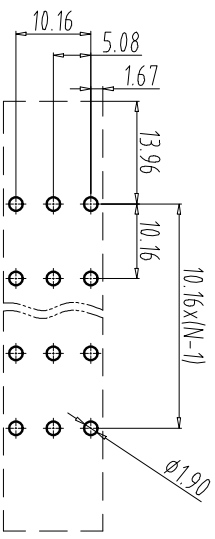
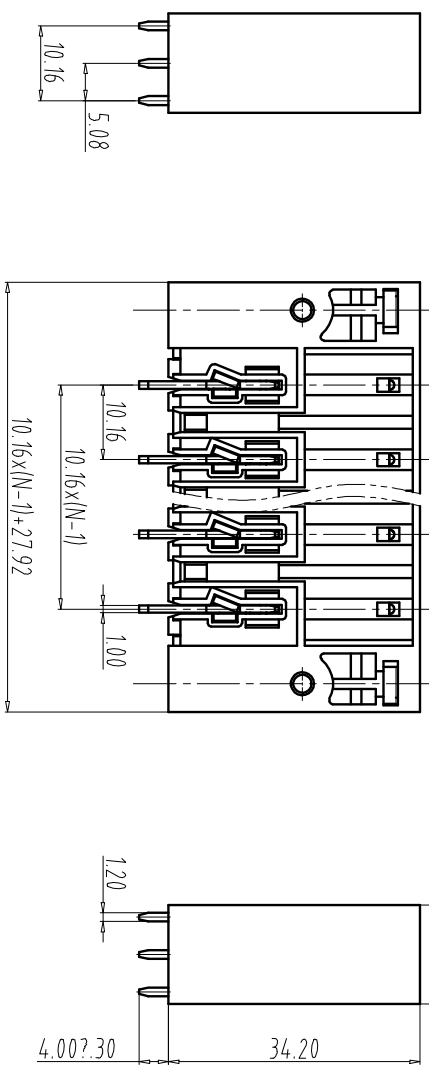


FILE: 2021-D01VUL0

REV	ECN NO.	CONTENT	CHK	DATE

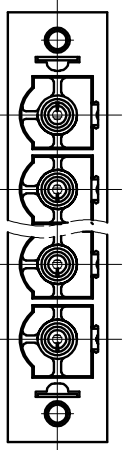

PCB LAYOUT

NOTES1:

UL Standard

Use group	B	C	D
Rated Current	52A	52A	5A
Rated Voltage	300V	300V	600V

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	6kV
Rate Voltage(V)	600V
Rate Current(A)	57A

NOTES2:

- 1.Housing1: PA66(UL94V-0)
- 2.Pin header: Copper(Ag Plated)
- 3.Nut: Steel(Zn Plated)

NOTES3:

- 1.Pitch: 10.16mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

UL0-TB83 - 2VM/10.16 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey
- 2:Blue
- 3:Black
- 4:Green
- 5:Orange
- 6:Red
- 7:transparent
- 8:Yellow
- 9:White

Total Pitch Tolerances		Nominal dimension range							
over	in mm	over	in mm	over	in mm	over	in mm	over	in mm
0	30	53	70	90	115	150	200	250	30
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30
to	to	to	to	to	to	to	to	to	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20
±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3
0.3	0.3	0.3	0.3	0.2	0.2	0.3	0.3	0.5	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.04.28	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	UL0-TB83-2VM/10.16-XXP-Y000A		
		DWGNO	UL0TB83Y000A		



NINGBO UL0 ELECTRONICS CO.,LTD.