


FILE: 2021-D01VULO

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

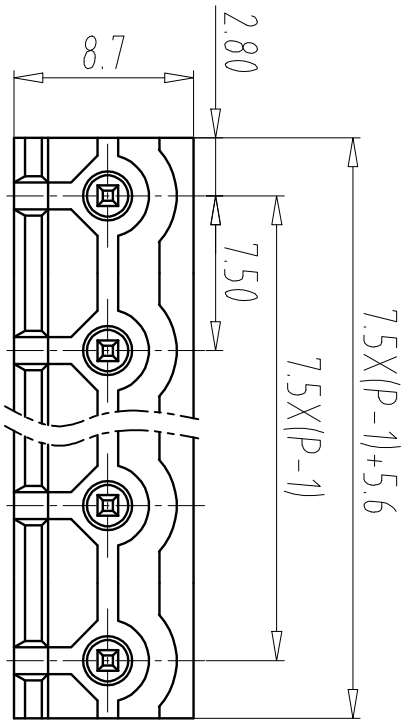

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	4.0kV
Rate Voltage(V)	400V
Rate Current(A)	20A

NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Solder Pin: Brass (Sn Plated)

NOTES3:


- 1.Pitch: 7.5mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.Stripping length: 7-8mm
- 4.RoHS Compliance

How to order

ULO-TB33 - 2V/7.5 - XXP - Y 0 0 0A

Certificate Series NO. Code Factory poles Customer requirements

- color:
- 1:Grey 2:Blue 3:Black
 - 4:Green 5:Orange 6:Red
 - 7:transparent 8:Yellow 9:White

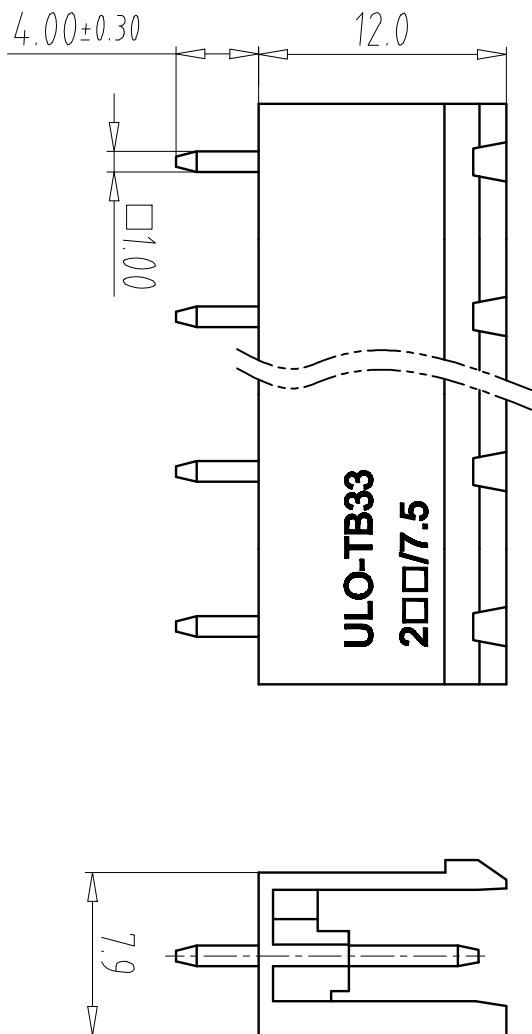

Total Pitch Tolerances												Nominal dimension range												—	//
in mm												in mm													

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150	150	150	150	150	
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5	
6												5												4	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.11	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	ULO-TB33-2V/7.5-XXP-Y000A		

NINGBO ULO ELECTRONICS CO.,LTD.

DWGNO. ULOTB33Y000A