
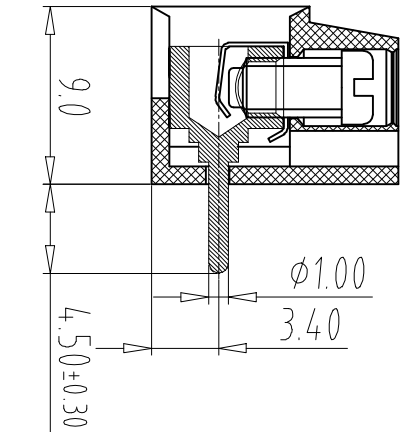


FILE: 2020-D01VUL0					
REV		EC.N NO.		CONTENT	
				CHK	DATE

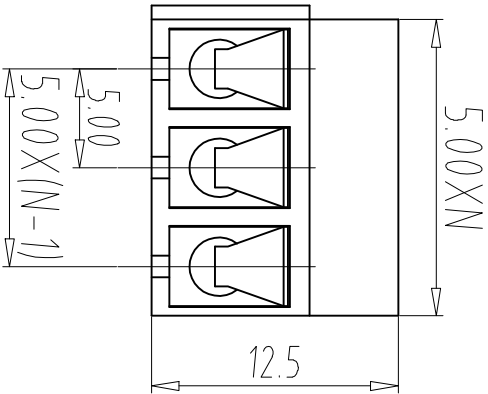


NOTES1:
UL Standard

1. Use group	B	C	D
Rated Current	10A	-	10A
Rated Voltage	300V	-	300V

2. Wire range: 22~14AWG
IEC Standard

1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	4kV
Rate Voltage(V)	250V
Rate Current(A)	24A

2. wire range: 1.0-2.5mm²
- NOTES2:
- 1.Housing: PA66(UL94V-0)
 - 2.Screw:Steel(M2.5/Zn Plated)
 - 3.Spring: Brass(Tin Plated)
 - 4.Block: Brass(INi Plated)

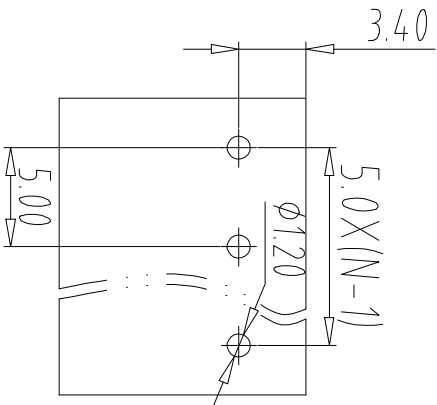

- NOTES3:
- 1.Pitch: 5.0mm Poles: 02-24P
 - 2.Stripping length: 6mm
 - 3.Operating temperature: -40℃~+105℃
 - 4.RoHS Compliance

How to order

UL0-TB25 - 300R/5.0 - XXP - Y 0 0 0 A

Certificate Factory poles Customer requirements

Series NO. Code

color:

- 1:Grey 2:Blue 3:Black
- 4:Green 5:Orange 6:Red
- 7:transparent 8:Yellow 9:white

Total Pitch Tolerances										Nominal dimension range										±	=	—	//
in mm										in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over				
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all				
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100				
±0.18 ±0.20 ±0.25 ±0.3 ±0.35 ±0.44 ±0.55 ±0.70 ±0.75 ±0.20 ±0.25 ±0.30 ±0.35 ±0.44 ±0.55 ±0.70 ±0.80 ±0.90										0.2	0.3	0.3	0.2	0.3	0.5								

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.04.23	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB25-300R/5.0-XXP-Y000A		



NINGBO UL0 ELECTRONICS CO.,LTD.



UL0TB25Y000A