



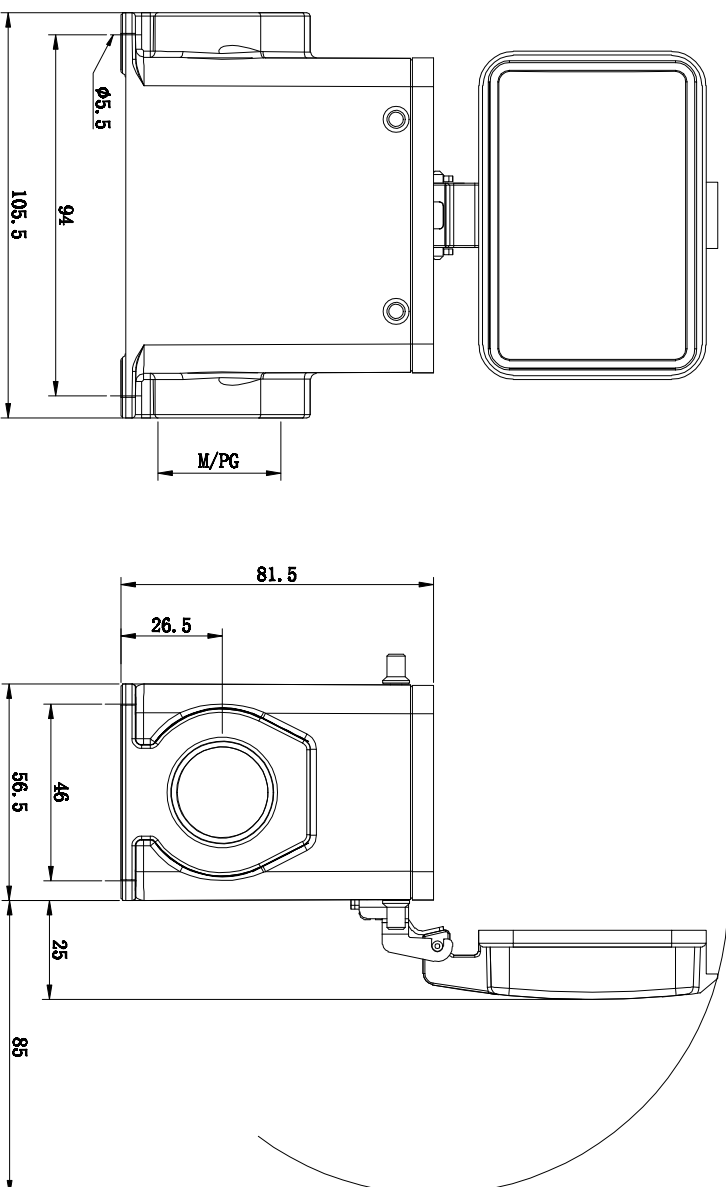

Technical specification:

1. Material: Aluminium die-cast
2. Material, cover: Aluminium die-cast
3. Surface: powder-coated
4. Colour: (grey)
5. Temperature range: -40°C - +125°C
6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
7. Cable entry: side entry
8. Thread size: M/PG
9. Hoods/Housings sealing: NBR

REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/PG)	
ULO-HC04-H32A-SF-4B-MCV-M25			M25	
ULO-HC04-H32A-SF-4B-MCV-M32			M32	
ULO-HC04-H32A-SF-4B-MCV-PG21			PG21	
ULO-HC04-H32A-SF-4B-MCV-PG29			PG29	

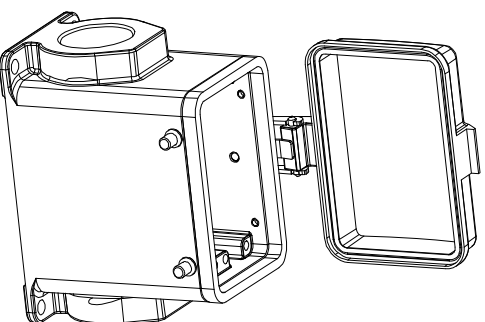

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-HC04-H32A-SF-4B-MCV-XX		
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.		



NINGBO ULO ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DWGNO.